



RF MEASUREMENT REPORT

Applicant: Ninebot (Changzhou) Tech Co., Ltd.
Address: 16F-17F, Block A, Building 3, Changwu Mid Road 18#,
Wujin Dist., Changzhou, Jiangsu, China
Product: Segway eKickScooter ZT3 Pro
Model No.: 051801E, 051801D, 051801A
Brand Name: Segway
Standards: EN 300 328 V2.2.2 (2019-07) Clause 4.3.1.10 & 4.3.1.11
Result: Complies
Received Date: 2024-07-08
Test Date: 2024-07-30

Reviewed By:

Vincent Yu

Approved By:

Robin Wu



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2407RSU022-E3	V01	Initial Report	2024-08-02	Valid

Note: The BT module (Model No.: NB-BT100) used in this device is certified. This report is based on the module report (Report No.: 2311RSU069-E2) and only performed the spot-check testing on “Transmitter Unwanted Emissions in the Spurious Domain” and “Receiver Spurious Emissions”.

CONTENTS

Description	Page
1. General Information	4
1.1. Applicant	4
1.2. Manufacturer.....	4
1.3. Testing Facility	4
1.4. Product Information	5
1.5. Radio Specification under Test	5
1.6. Working Frequencies.....	6
2. Test Configuration	7
2.1. Test Mode	7
2.2. Test System Connection Diagram	7
2.3. Test Software	7
2.4. Test Environment Condition.....	7
3. Measuring Instrument	8
4. Decision Rules and Measurement Uncertainty.....	9
4.1. Decision Rules.....	9
4.2. Measurement Uncertainty	9
5. Test Result	10
5.1. Summary	10
5.2. Transmitter Unwanted Emissions in the Spurious Domain Measurement	11
5.2.1. Test Limit.....	11
5.2.2. Test Setup.....	11
5.2.3. Test Procedure	12
5.2.4. Test Result	13
5.3. Receiver Spurious Emissions Measurement.....	16
5.3.1. Test Limit.....	16
5.3.2. Test Setup.....	16
5.3.3. Test Procedure	17
5.3.4. Test Result	18
Appendix A - Test Setup Photograph	21
Appendix B - EUT Photograph	22

1. General Information

1.1. Applicant

Ninebot (Changzhou) Tech Co., Ltd.

16F-17F, Block A, Building 3, Changwu Mid Road 18#, Wujin Dist., Changzhou, Jiangsu, China

1.2. Manufacturer

Ninebot (Changzhou) Tech Co., Ltd.

16F-17F, Block A, Building 3, Changwu Mid Road 18#, Wujin Dist., Changzhou, Jiangsu, China

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Segway eKickScooter ZT3 Pro
Model No.	051801E, 051801D, 051801A
Serial No.	1K1EA2427P0058
Brand Name	Segway
Rated Input	53.6VDC, 1.3A
Bluetooth Specification	BR/EDR/BLE(1M/2M)
Accessory	
AC Adapter	Model: NBW54D601D3D01 Input: 100-240V ~ 50-60Hz 2.5A MAX Output: 53.6VDC 3.9A MAX
Notes:	
1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	
2. The models are only the running speed different. As required by the manufacturer, we select Model No.: 051801E for testing in this report.	

1.5. Radio Specification under Test

Operating Frequency	2402~2480MHz
Channel Number	79
Type of modulation	GFSK, Pi/4 DQPSK, 8DPSK
Data Rate	1Mbps, 2Mbps, 3Mbps
Antenna Type	PCB Antenna
Antenna Gain	0.79dBi

1.6. Working Frequencies


Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz
03	2405 MHz	04	2406 MHz	05	2407 MHz
06	2408 MHz	07	2409 MHz	08	2410 MHz
09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz
15	2417 MHz	16	2418 MHz	17	2419 MHz
18	2420 MHz	19	2421 MHz	20	2422 MHz
21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz
27	2429 MHz	28	2430 MHz	29	2431 MHz
30	2432 MHz	31	2433 MHz	32	2434 MHz
33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz
39	2441 MHz	40	2442 MHz	41	2443 MHz
42	2444 MHz	43	2445 MHz	44	2446 MHz
45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz
51	2453 MHz	52	2454 MHz	53	2455 MHz
54	2456 MHz	55	2457 MHz	56	2458 MHz
57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz
63	2465 MHz	64	2466 MHz	65	2467 MHz
66	2468 MHz	67	2469 MHz	68	2470 MHz
69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz
75	2477 MHz	76	2478 MHz	77	2479 MHz
78	2480 MHz	-	-	-	-

2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by DH5
Mode 2: Transmit by 2DH5
Mode 3: Transmit by 3DH5
Mode 4: Receive by DH5
Mode 5: Receive by 2DH5
Mode 6: Receive by 3DH5

2.2. Test System Connection Diagram

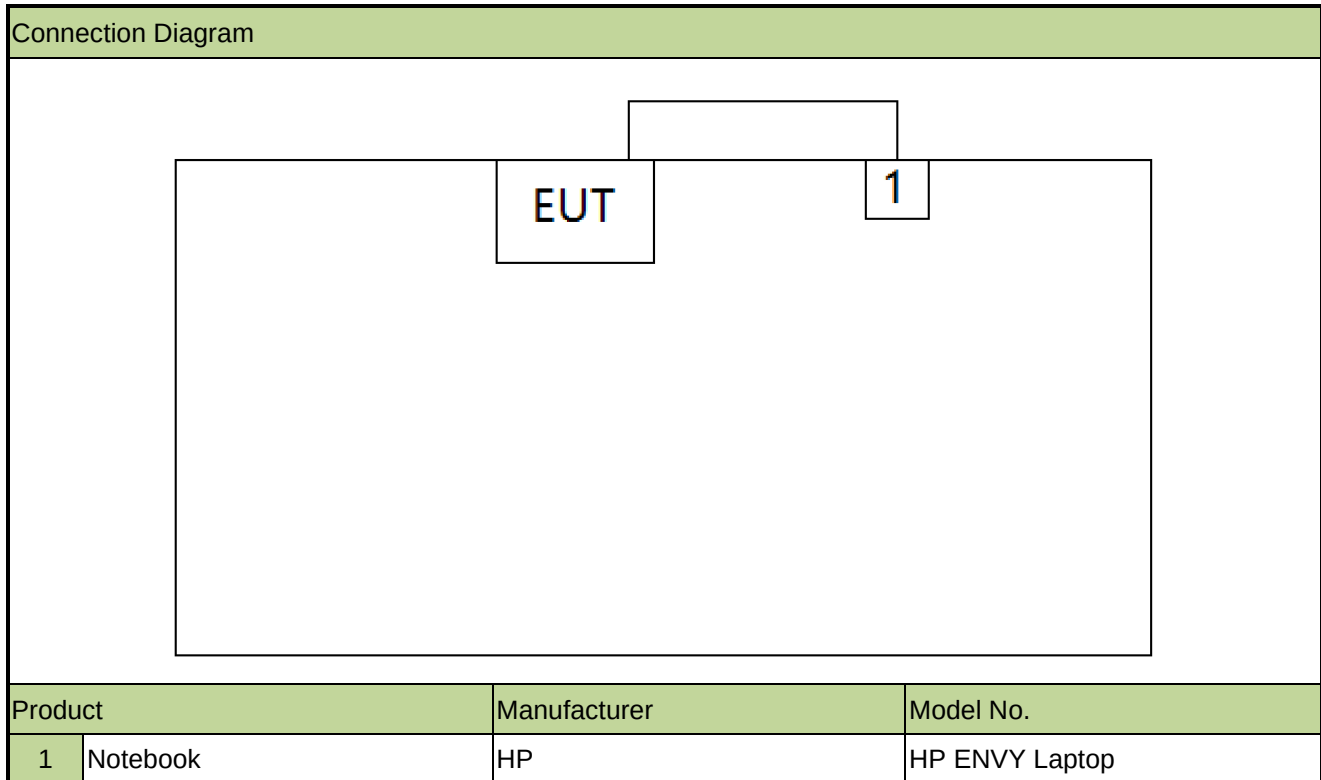

2.3. Test Software

The test utility software used during testing was “sscom.exe”, and the version was 5.13.1.

2.4. Test Environment Condition

Ambient Temp.	15 ~ 35°C
Relative Humidity	20 ~75%RH

3. Measuring Instrument

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2024-12-21	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2024-10-28	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2025-07-05	SIP-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2024-12-17	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2024-10-23	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2024-11-03	SIP-AC2
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06647	1 year	2025-06-15	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2024-12-21	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2024-10-21	SIP-AC2

Software	Version	Function
e3	230711	RE & CE
Controller_MF 7802BS	1.02	RE Antenna & Turntable

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Parameter	Uncertainty
All Emissions, Radiated	6 dB
Temperature	3 °C
Humidity	5 %
DC and Low Frequency Voltages	3 %
Time	5 %

5. Test Result

5.1. Summary

Standard Clause	Test Parameter	Verdict
4.3.1.10	Transmitter Unwanted Emissions in the Spurious Domain	Pass
4.3.1.11	Receiver Spurious Emissions	Pass

5.2. Transmitter Unwanted Emissions in the Spurious Domain Measurement


5.2.1. Test Limit

Transmitter Limits for Spurious Emissions		
Frequency Range	Maximum Power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87.5 MHz	-36 dBm	100 kHz
87.5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12.75 GHz	-30 dBm	1 MHz


Note: These limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

5.2.2. Test Setup

Below 1GHz Test Setup:

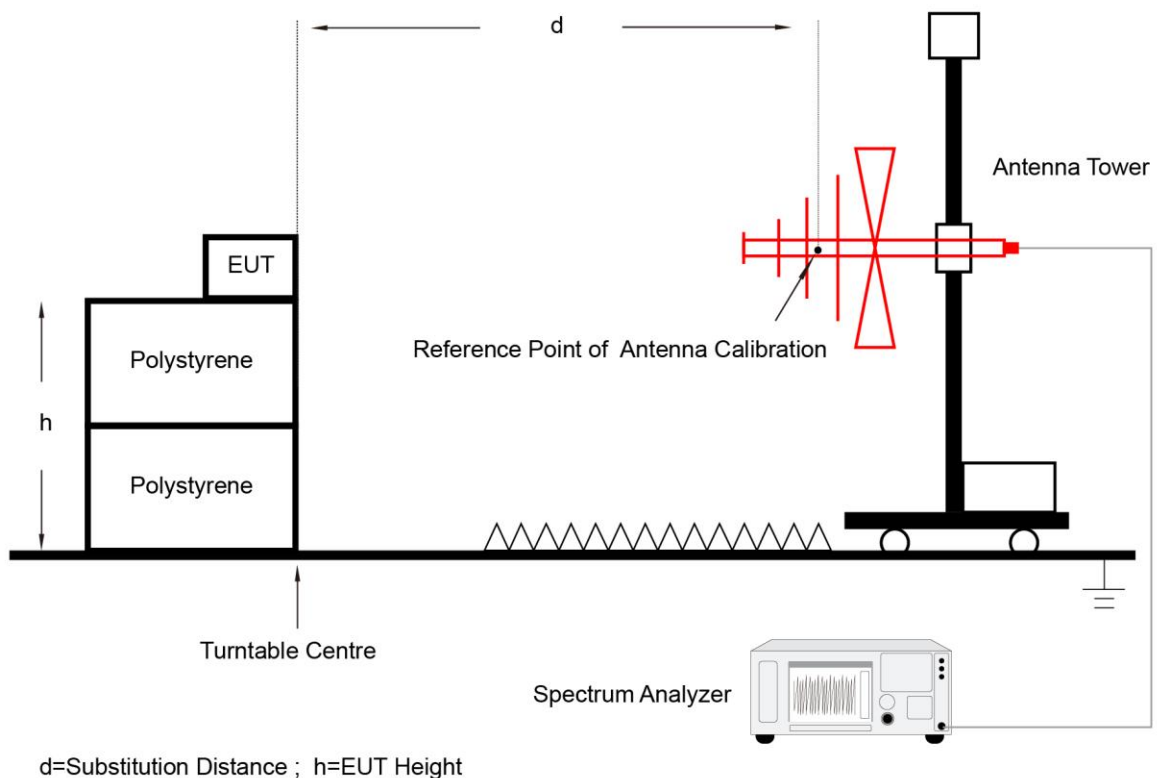

Above 1GHz Test Setup:

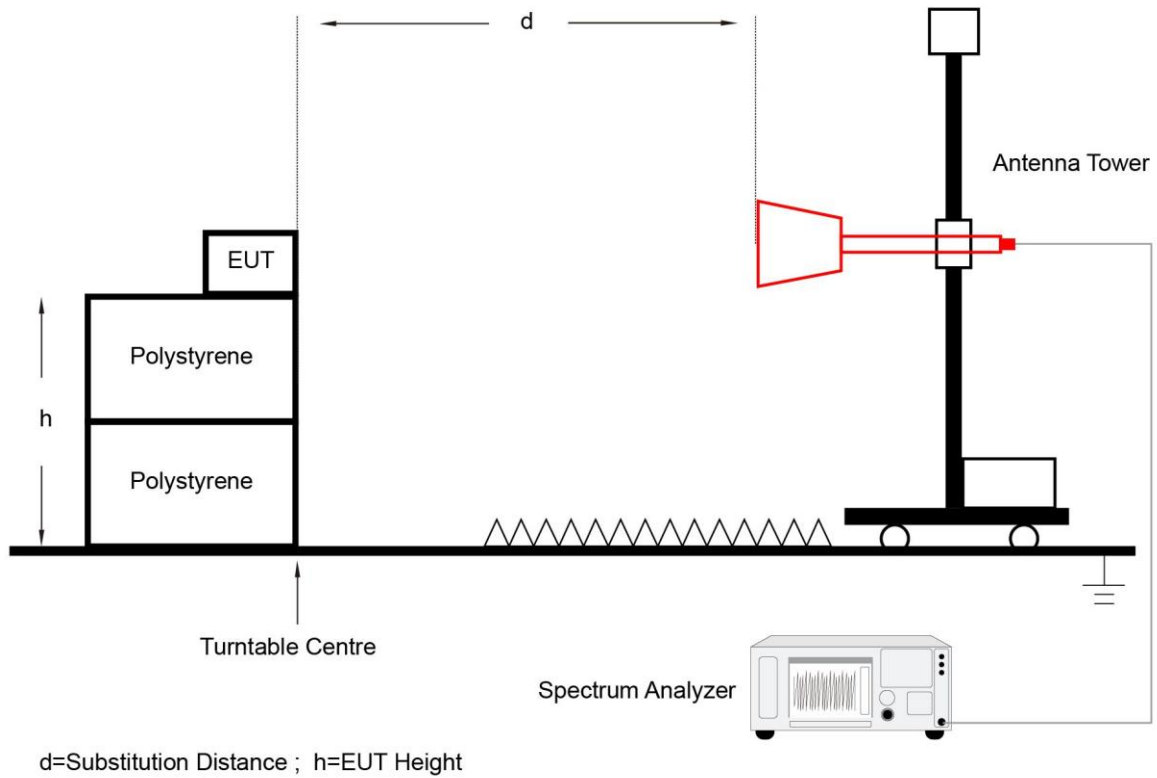

5.2.3. Test Procedure

Refer to EN300 328 V2.2.2 (2019-07) Clause 5.4.9.2.2

5.2.4. Test Result

Test Site	SIP-AC1 & SIP-AC2	Test Engineer	Barry Wu
Test Date	2024-07-30	Test Mode	DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	175.3	-99.4	29.4	-70.0	-54.0	-16.0	Peak	Horizontal
	722.7	-104.9	34.7	-70.2	-54.0	-16.2	Peak	Horizontal
	67.8	-99.2	26.4	-72.8	-54.0	-18.8	Peak	Vertical
	99.3	-106.4	31.3	-75.1	-54.0	-21.1	Peak	Vertical
	7212.2	-62.5	10.9	-51.6	-30.0	-21.6	Peak	Horizontal
	11002.8	-63.8	16.7	-47.1	-30.0	-17.1	Peak	Horizontal
	7333.3	-62.0	10.8	-51.2	-30.0	-21.2	Peak	Vertical
	11543.3	-65.5	17.7	-47.8	-30.0	-17.8	Peak	Vertical
78	175.5	-99.1	29.4	-69.7	-54.0	-15.7	Peak	Horizontal
	797.0	-104.9	35.3	-69.6	-54.0	-15.6	Peak	Horizontal
	95.3	-105.6	31.2	-74.4	-54.0	-20.4	Peak	Vertical
	765.8	-105.2	35.5	-69.7	-54.0	-15.7	Peak	Vertical
	8732.7	-63.0	13.0	-50.0	-30.0	-20.0	Peak	Horizontal
	11573.8	-65.3	17.3	-48.0	-30.0	-18.0	Peak	Horizontal
	7946.6	-63.5	12.2	-51.3	-30.0	-21.3	Peak	Vertical
	11470.4	-65.2	17.7	-47.5	-30.0	-17.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: For emission below 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

For emission above 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) -
Pre_Amplifier Gain (dB)

Note 3: Test Distance "d" = 3m, Test height "h" = 1.5m

Test Site	SIP-AC1 & SIP-AC2	Test Engineer	Barry Wu
Test Date	2024-07-30	Test Mode	2DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	174.7	-97.0	29.5	-67.5	-54.0	-13.5	Peak	Horizontal
	665.8	-104.2	34.5	-69.7	-54.0	-15.7	Peak	Horizontal
	67.8	-100.1	26.4	-73.7	-54.0	-19.7	Peak	Vertical
	775.8	-106.0	35.5	-70.5	-54.0	-16.5	Peak	Vertical
	8604.6	-63.4	12.3	-51.1	-30.0	-21.1	Peak	Horizontal
	11634.9	-64.8	16.9	-47.9	-30.0	-17.9	Peak	Horizontal
	7983.0	-63.9	12.1	-51.8	-30.0	-21.8	Peak	Vertical
	11106.2	-64.6	17.0	-47.6	-30.0	-17.6	Peak	Vertical
78	175.7	-99.4	29.4	-70.0	-54.0	-16.0	Peak	Horizontal
	707.4	-104.8	34.8	-70.0	-54.0	-16.0	Peak	Horizontal
	67.9	-99.0	26.4	-72.6	-54.0	-18.6	Peak	Vertical
	841.5	-104.9	35.8	-69.1	-54.0	-15.1	Peak	Vertical
	7159.4	-62.2	10.6	-51.6	-30.0	-21.6	Peak	Horizontal
	10891.2	-64.4	16.5	-47.9	-30.0	-17.9	Peak	Horizontal
	7764.5	-61.8	10.8	-51.0	-30.0	-21.0	Peak	Vertical
	11008.7	-64.7	16.9	-47.8	-30.0	-17.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: For emission below 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

For emission above 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) -

Pre_Amplifier Gain (dB)

Note 3: Test Distance "d" = 3m, Test height "h" = 1.5m

Test Site	SIP-AC1 & SIP-AC2	Test Engineer	Barry Wu
Test Date	2024-07-30	Test Mode	3DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	176.8	-100.5	29.3	-71.2	-54.0	-17.2	Peak	Horizontal
	668.4	-104.8	34.6	-70.2	-54.0	-16.2	Peak	Horizontal
	67.8	-101.0	26.4	-74.6	-54.0	-20.6	Peak	Vertical
	816.8	-105.4	35.4	-70.0	-54.0	-16.0	Peak	Vertical
	7954.8	-63.4	12.2	-51.2	-30.0	-21.2	Peak	Horizontal
	11412.9	-64.8	17.0	-47.8	-30.0	-17.8	Peak	Horizontal
	7308.6	-62.8	11.1	-51.7	-30.0	-21.7	Peak	Vertical
	11556.2	-65.4	17.4	-48.0	-30.0	-18.0	Peak	Vertical
78	47.6	-105.1	29.9	-75.2	-54.0	-21.2	Peak	Horizontal
	174.7	-100.0	29.5	-70.5	-54.0	-16.5	Peak	Horizontal
	67.9	-102.0	26.4	-75.6	-54.0	-21.6	Peak	Vertical
	742.8	-105.7	35.2	-70.5	-54.0	-16.5	Peak	Vertical
	7961.9	-63.0	12.2	-50.8	-30.0	-20.8	Peak	Horizontal
	11573.8	-65.1	17.3	-47.8	-30.0	-17.8	Peak	Horizontal
	7961.9	-63.0	12.3	-50.7	-30.0	-20.7	Peak	Vertical
	11479.8	-64.8	17.6	-47.2	-30.0	-17.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: For emission below 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

For emission above 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) -

Pre_Amplifier Gain (dB)

Note 3: Test Distance "d" = 3m, Test height "h" = 1.5m

5.3. Receiver Spurious Emissions Measurement


5.3.1. Test Limit

Spurious Emissions Limits for Receivers		
Frequency Range	Maximum Power	Measurement Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12.75 GHz	-47 dBm	1 MHz


Note: These limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

5.3.2. Test Setup

Below 1GHz Test Setup:

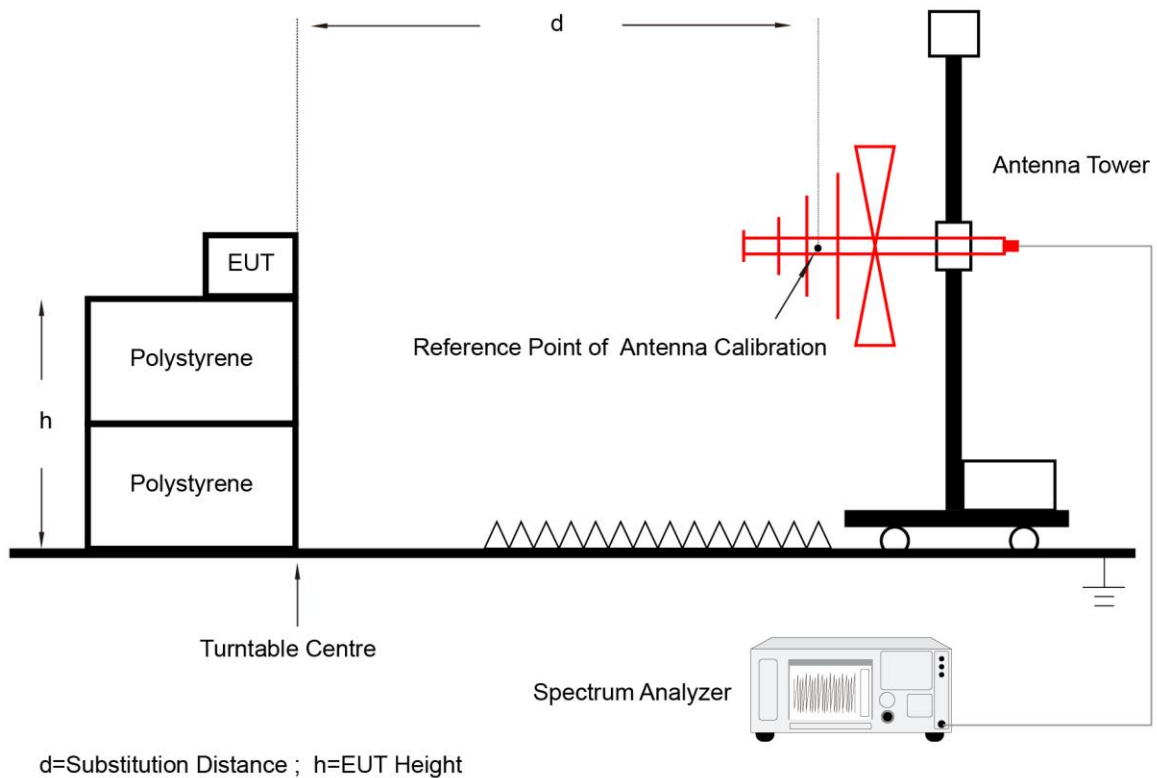

Above 1GHz Test Setup:

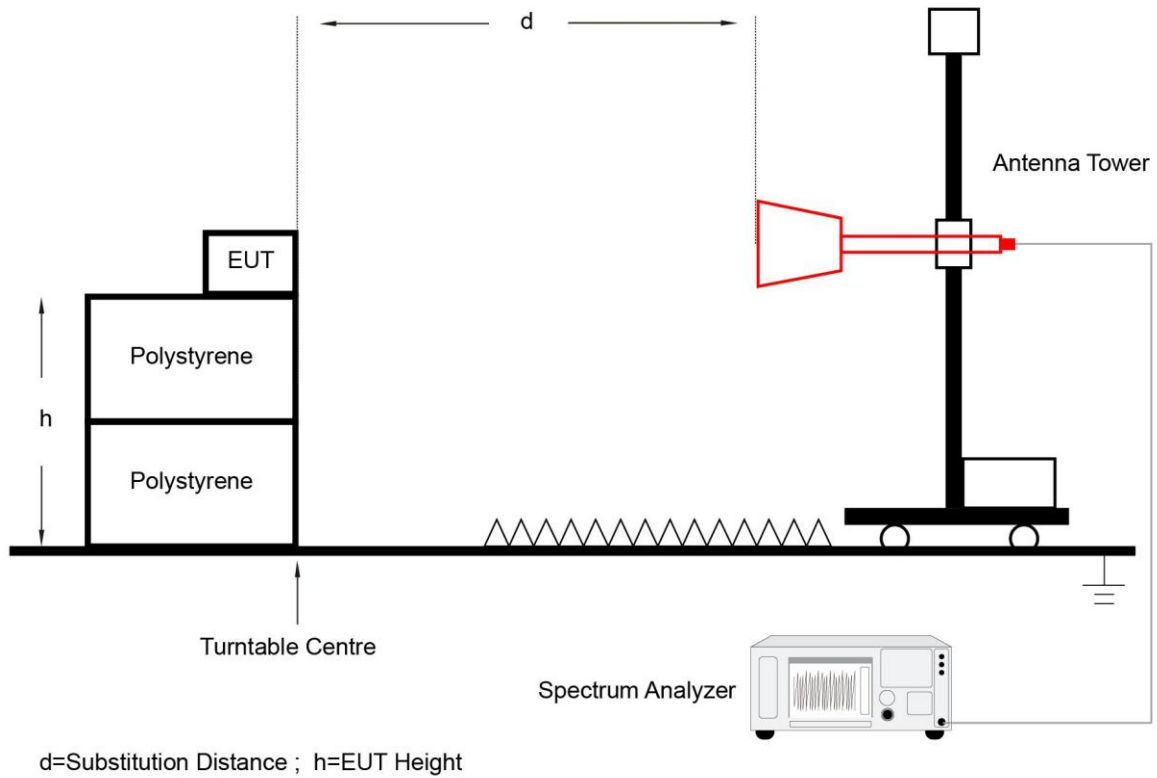

5.3.3. Test Procedure

Refer to EN300 328 V2.2.2 (2019-07) Clause 5.4.10.2.2.

5.3.4. Test Result

Test Site	SIP-AC1 & SIP-AC2	Test Engineer	Barry Wu
Test Date	2024-07-30	Test Mode	DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	161.9	-95.7	29.0	-66.7	-57.0	-9.7	Peak	Horizontal
	947.4	-106.3	37.4	-68.9	-57.0	-11.9	Peak	Horizontal
	161.4	-101.8	27.7	-74.1	-57.0	-17.1	Peak	Vertical
	913.8	-105.8	37.0	-68.8	-57.0	-11.8	Peak	Vertical
	1920.0	-54.4	-2.8	-57.2	-47.0	-10.2	Peak	Horizontal
	5953.8	-61.6	6.3	-55.3	-47.0	-8.3	Peak	Horizontal
	3525.1	-58.9	0.5	-58.4	-47.0	-11.4	Peak	Vertical
	5723.5	-61.0	5.8	-55.2	-47.0	-8.2	Peak	Vertical
78	163.3	-96.0	29.1	-66.9	-57.0	-9.9	Peak	Horizontal
	950.1	-104.9	37.3	-67.6	-57.0	-10.6	Peak	Horizontal
	432.1	-103.3	30.0	-73.3	-57.0	-16.3	Peak	Vertical
	914.8	-105.5	37.0	-68.5	-57.0	-11.5	Peak	Vertical
	1918.9	-54.6	-2.8	-57.4	-47.0	-10.4	Peak	Horizontal
	5557.8	-61.6	5.7	-55.9	-47.0	-8.9	Peak	Horizontal
	1920.0	-55.5	-2.4	-57.9	-47.0	-10.9	Peak	Vertical
	4631.9	-59.2	3.5	-55.7	-47.0	-8.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: For emission below 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

For emission above 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) -
Pre_Amplifier Gain (dB)

Note 3: Test Distance "d" = 3m, Test height "h" = 1.5m

Test Site	SIP-AC1 & SIP-AC2	Test Engineer	Barry Wu
Test Date	2024-07-30	Test Mode	2DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	165.1	-96.7	29.3	-67.4	-57.0	-10.4	Peak	Horizontal
	850.1	-106.3	36.3	-70.0	-57.0	-13.0	Peak	Horizontal
	161.5	-101.6	27.7	-73.9	-57.0	-16.9	Peak	Vertical
	949.4	-104.6	37.3	-67.3	-57.0	-10.3	Peak	Vertical
	1920.0	-54.1	-2.8	-56.9	-47.0	-9.9	Peak	Horizontal
	5097.2	-60.1	5.6	-54.5	-47.0	-7.5	Peak	Horizontal
	2883.5	-56.6	-0.4	-57.0	-47.0	-10.0	Peak	Vertical
	5646.0	-61.2	5.8	-55.4	-47.0	-8.4	Peak	Vertical
78	160.9	-96.2	28.9	-67.3	-57.0	-10.3	Peak	Horizontal
	890.7	-104.2	35.8	-68.4	-57.0	-11.4	Peak	Horizontal
	84.6	-105.6	31.6	-74.0	-57.0	-17.0	Peak	Vertical
	966.6	-105.8	37.3	-68.5	-57.0	-11.5	Peak	Vertical
	1920.0	-54.7	-2.8	-57.5	-47.0	-10.5	Peak	Horizontal
	4989.1	-60.6	4.5	-56.1	-47.0	-9.1	Peak	Horizontal
	1920.0	-55.0	-2.4	-57.4	-47.0	-10.4	Peak	Vertical
	4881.0	-60.0	3.7	-56.3	-47.0	-9.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: For emission below 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

For emission above 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) -

Pre_Amplifier Gain (dB)

Note 3: Test Distance "d" = 3m, Test height "h" = 1.5m

Test Site	SIP-AC1 & SIP-AC2	Test Engineer	Barry Wu
Test Date	2024-07-30	Test Mode	3DH5

Channel No.	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
00	162.4	-99.3	29.1	-70.2	-57.0	-13.2	Peak	Horizontal
	937.8	-106.1	37.1	-69.0	-57.0	-12.0	Peak	Horizontal
	86.0	-106.3	31.6	-74.7	-57.0	-17.7	Peak	Vertical
	950.1	-106.5	37.3	-69.2	-57.0	-12.2	Peak	Vertical
	1920.0	-53.6	-2.8	-56.4	-47.0	-9.4	Peak	Horizontal
	5113.7	-60.4	5.3	-55.1	-47.0	-8.1	Peak	Horizontal
	1920.0	-56.5	-2.4	-58.9	-47.0	-11.9	Peak	Vertical
	5026.7	-60.3	5.1	-55.2	-47.0	-8.2	Peak	Vertical
78	167.1	-96.4	29.2	-67.2	-57.0	-10.2	Peak	Horizontal
	941.5	-106.6	37.1	-69.5	-57.0	-12.5	Peak	Horizontal
	81.4	-105.9	30.8	-75.1	-57.0	-18.1	Peak	Vertical
	928.7	-106.3	37.1	-69.2	-57.0	-12.2	Peak	Vertical
	1920.0	-54.2	-2.8	-57.0	-47.0	-10.0	Peak	Horizontal
	5647.1	-61.0	5.4	-55.6	-47.0	-8.6	Peak	Horizontal
	1977.6	-58.5	-1.2	-59.7	-47.0	-12.7	Peak	Vertical
	5658.9	-61.6	6.2	-55.4	-47.0	-8.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: For emission below 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

For emission above 1GHz:

Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) -

Pre_Amplifier Gain (dB)

Note 3: Test Distance "d" = 3m, Test height "h" = 1.5m

Appendix A - Test Setup Photograph

Refer to “2407RSU022-ET” file.

Appendix B - EUT Photograph

Refer to “2407RSU022-EE” file.

The End
