

TEST REPORT

Application No.: SZCR2106021639AT(SHEM2106005829CR)
Applicant: Hangzhou Ezviz Software Co., Ltd.
Address of Applicant: Room 302, Unit B, Building 2,399 Danfeng Road, Binjiang District, Hangzhou, Zhejiang
Manufacturer: Hangzhou Ezviz Software Co., Ltd.
Address of Manufacturer: Room 302, Unit B, Building 2,399 Danfeng Road, Binjiang District, Hangzhou, Zhejiang
Equipment Under Test (EUT):
EUT Name: Open/Close Sensor
Model No.: CS-T2C
Trade mark: EZVIZ
Standard(s) : EN 55032:2015+A11:2020
 EN 50130-4:2011 +A1:2014
Date of Receipt: 2021-06-11
Date of Test: 2021-06-13 to 2021-06-17
Date of Issue: 2021-06-18

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Revision Record			
Version	Description	Date	Remark
01	Original	2021-06-18	/

Authorized for issue by:			
		<i>Bill Chen</i>	
		Bill Chen /Project Engineer	
		<i>Eric Fu</i>	
		Eric Fu /Reviewer	



2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Radiated Emissions (30MHz-1GHz)	EN 55032:2015 +A11:2020	EN 55032:2015	Class B	Pass
Radiated Emissions (above 1GHz)	EN 55032:2015 +A11:2020	EN 55032:2015	Class B	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN 50130-4:2011 +A1:2014	EN 61000-4-2:2009	6kV Contact Discharge 2,4,8kV Air Discharge	Pass
Radiated Immunity(80MHz-2.7GHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-3:2006 +A1:2008+A2:2010	10V/m, 80%, 1kHz sinusoidal Amp. Mod.	Pass

InternalSource	UpperFrequency
Below 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5 times the highest frequency or 6 GHz, whichever is less



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 DETAILS OF E.U.T.	5
4.2 DESCRIPTION OF SUPPORT UNITS.....	5
4.3 MEASUREMENT UNCERTAINTY	6
4.4 TEST LOCATION	7
4.5 TEST FACILITY	7
4.6 DEVIATION FROM STANDARDS	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
5 EQUIPMENT LIST	8
6 EMISSION TEST RESULTS	10
6.1 RADIATED EMISSIONS (30MHZ-1GHZ)	10
6.2 RADIATED EMISSIONS (ABOVE 1GHZ)	14
7 IMMUNITY TEST RESULTS.....	17
7.1 PERFORMANCE CRITERIA DESCRIPTION IN EN 50130-4:2011 +A1:2014.....	17
7.2 ELECTROSTATIC DISCHARGE	18
7.3 RADIATED IMMUNITY(80MHZ-2.7GHZ)	19
8 PHOTOGRAPHS	21
8.1 RADIATED EMISSIONS (30MHZ-1GHZ) TEST SETUP.....	21
8.2 RADIATED EMISSIONS (ABOVE 1GHZ) TEST SETUP.....	21
8.3 ELECTROSTATIC DISCHARGE TEST SETUP	22
8.4 RADIATED IMMUNITY(80MHZ-2.7GHZ) TEST SETUP.....	22
8.5 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	23



4 General Information

4.1 Details of E.U.T.

Power supply: DC 3V by Lithium Battery

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
2.4 G Router	CISCO	RV110W	/
Home Gateway	Hangzhou Ezviz Software Co., Ltd.	CS-A3	/
Mobile Phone	nubia	Z20	/
PIR Sensor	Hangzhou Ezviz Software Co., Ltd.	CS-T1C	/
Smart button	Hangzhou Ezviz Software Co., Ltd.	CS-T3C	/



4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 3.45dB (9kHz to 150kHz)
		± 3.0dB (150kHz to 30MHz)
2	Radiated Emission	± 3.1dB (9kHz-30MHz)
		± 4.5dB (30MHz-1GHz)
		± 4.8dB (1GHz-6GHz)
3	Radiated Emission (2m Loop antenna)	± 3.26dB (9kHz-30MHz)
4	Radiated Power	± 3.64dB
5	Harmonics & Flicker	± 0.068dB
6	Radiated Immunity	± 1.64dB
7	Conducted Immunity	± 0.96dB
8	ESD	± 6 %
9	EFT (Electrical Fast Transients)	± 5 %
10	Surge Immunity	± 5 %
11	Voltage Dips and Interruptions	± 4 %
12	20 system	± 1.5dB
13	Temperature test	± 1°C
14	Humidity test	± 3%
15	DC power test	± 0.5 %

Remark:

The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI (Member No. 1937)**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

RE in Chamber <1GHz						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2020-07-19	2023-07-18
2	MXE EMI receiver (3Hz-3.6GHz)	KEYSIGHT	N9038A	SEM004-15	2020-11-02	2021-11-01
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-02	2019-05-24	2022-05-23
4	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2021-03-24	2022-03-23
5	Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
6	Coaxial Cable	SGS	N/A	SEM025-01	2020-07-10	2021-07-09

RE in Chamber >1GHz						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2021-03-12	2024-03-11
2	EXA Signal Analyzer (10Hz-44GHz)	Agilent Technologies Inc	N9010A	SEM004-12	2021-04-07	2024-04-06
3	Horn Antenna (800MHz-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2021-04-12	2024-04-11
4	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2020-09-23	2021-09-22
5	Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
6	Coaxial Cable	SGS	N/A	SEM026-01	2020-07-10	2021-07-09

ESD						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
1	ESD Generator	TESEQ AG	NSG 437	SEM019-02	2021-04-16	2022-04-15
2	ESD Ground Plane	SGS(3m*3m)	N/A	SEN006-01	N/A	N/A



Radiated Immunity						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	Fully-Anechoic Chamber 2	Chang Zhou Zhong Shuo	854	SEM001-05	2020-07-10	2021-07-09
2	Power Sensor	Rohde & Schwarz	NRP-Z91	SEM009-09	2021-03-24	2022-03-23
3	Stacked Log.-Per.-Broadband Antenna (70MHz-10GHz)	Schwarzbeck	STLP 9129	SEM003-25	N/A	N/A
4	Signal Generator (9kHz-6GHz)	Rohde & Schwarz	SMB100A	SEM006-11	2021-03-24	2022-03-23
5	Broadband Amplifier (80MHz-1GHz)	Rohde & Schwarz	BBA150-BC250	SEM005-12	2020-09-23	2021-09-22
6	Broadband Amplifier (800MHz-3GHz)	Rohde & Schwarz	BBA150-D110	SEM005-13	2021-03-24	2022-03-23
7	Broadband Amplifier (2.5GHz-6GHz)	Rohde & Schwarz	BBA150-E60	SEM005-16	2021-04-08	2022-04-07
8	Measurement Software	Rohde & Schwarz	EMC32 V9.25.00	N/A	N/A	N/A

General used equipment						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
1	Humidity/Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2020-09-25	2021-09-24
2	Humidity/Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2020-09-25	2021-09-24
3	Humidity/Temperature Indicator	Mingle	N/A	SEM002-08	2020-09-25	2021-09-24
4	Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2021-04-06	2022-04-05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

6 Emission Test Results

6.1 Radiated Emissions (30MHz-1GHz)

Test Requirement:	EN 55032:2015+A11:2020
Test Method:	EN 55032:2015
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Limit:	
30MHz-230MHz	40 dB(μV/m) quasi-peak
230MHz-1GHz	47 dB(μV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz


6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar

Test mode a: Normal Working_The Open/Close Sensor, PIR Sensor, Smart button connected with Home Gateway through ZigBee signal, and the Home Gate way connected with the wireless router through WiFi, use the mobile phone connected with the router to observe the status information.

6.1.2 Test Setup Diagram

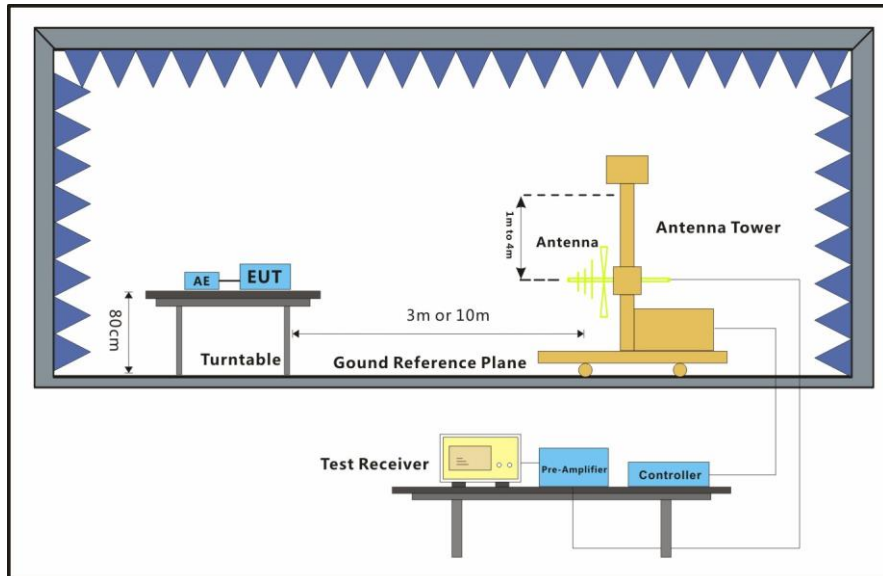

6.1.3 Measurement Data


An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

- 1.Result (dBuV/m) = Reading(dBuV) + Correction Factor (dB/m)
- 2.Correction Factor (dB/m)=Antenna Factor (dB/m)+Cable Loss (dB)- Amplifier (dB)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Mode:a; Polarization:Horizontal

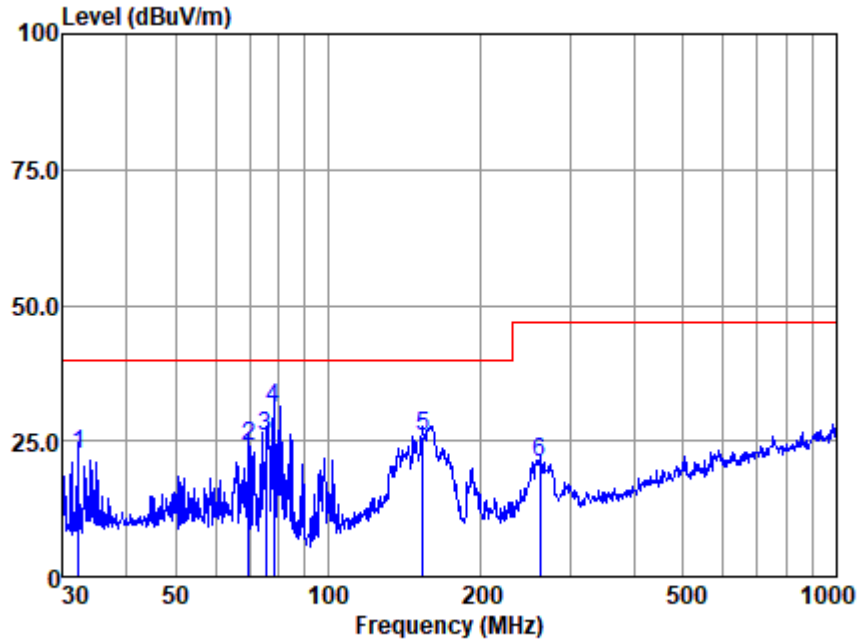


Antenna Polarity :HORIZONTAL
EUT/Project :5830CR
Test mode :a

	Read	Antenna	Cable	Preamp	Emission	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	32.179	41.28	12.29	0.81	31.80	22.58	40.00	-17.42 QP
2	69.600	42.09	11.76	1.21	31.03	24.03	40.00	-15.97 QP
3	75.446	45.01	10.32	1.27	30.92	25.68	40.00	-14.32 QP
4	78.139	51.39	9.66	1.29	31.46	30.88	40.00	-9.12 QP
5	153.739	42.25	13.02	1.89	31.32	25.84	40.00	-14.16 QP
6	261.058	37.42	12.14	2.65	31.07	21.14	47.00	-25.86 QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Mode:a; Polarization:Vertical

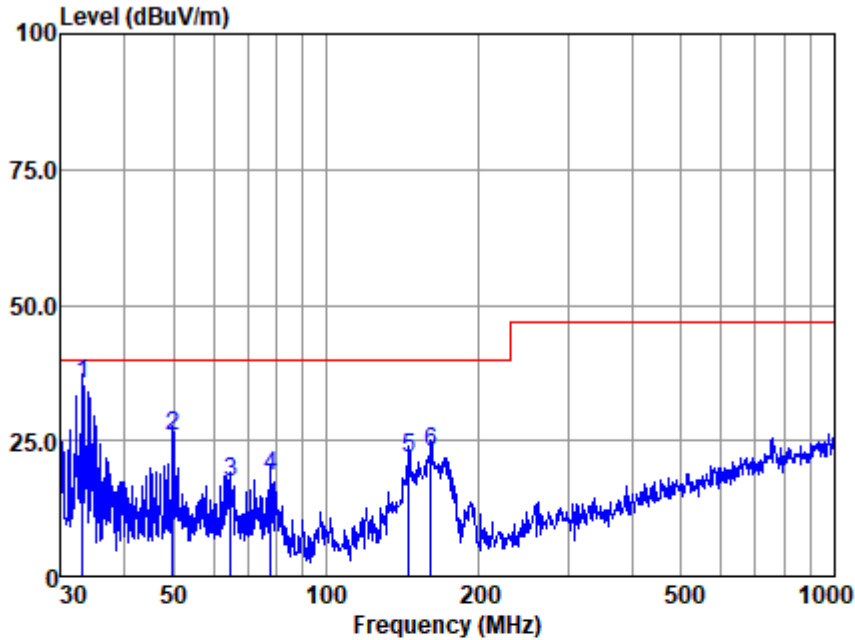

Antenna Polarity :VERTICAL
EUT/Project :5830CR
Test mode :a

	Read	Antenna	Cable	Preamp	Emission	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	33.095	54.03	12.33	0.81	31.80	35.37	40.00	-4.63	QP
2	49.881	43.17	13.69	1.00	32.06	25.80	40.00	-14.20	QP
3	64.887	35.13	12.40	1.16	31.43	17.26	40.00	-22.74	QP
4	77.865	39.06	9.73	1.29	31.45	18.63	40.00	-21.37	QP
5	145.351	38.94	12.72	1.83	31.55	21.94	40.00	-18.06	QP
6	160.346	39.16	13.18	1.93	31.22	23.05	40.00	-16.95	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




6.2 Radiated Emissions (above 1GHz)

Test Requirement: EN 55032:2015+A11:2020
 Test Method: EN 55032:2015
 Frequency Range: Above 1GHz
 Measurement Distance: 3m
 Limit:
 1GHz-3GHz 70 dB(μV/m) peak, 50 dB(μV/m) average
 3GHz-6GHz 74 dB(μV/m) peak, 54dB(μV/m) average
 Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 6000MHz

6.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar
 Test mode a: Normal Working_The Open/Close Sensor, PIR Sensor, Smart button connected with Home Gateway through ZigBee signal, and the Home Gate way connected with the wireless router through WiFi, use the mobile phone connected with the router to observe the status information.

6.2.2 Test Setup Diagram

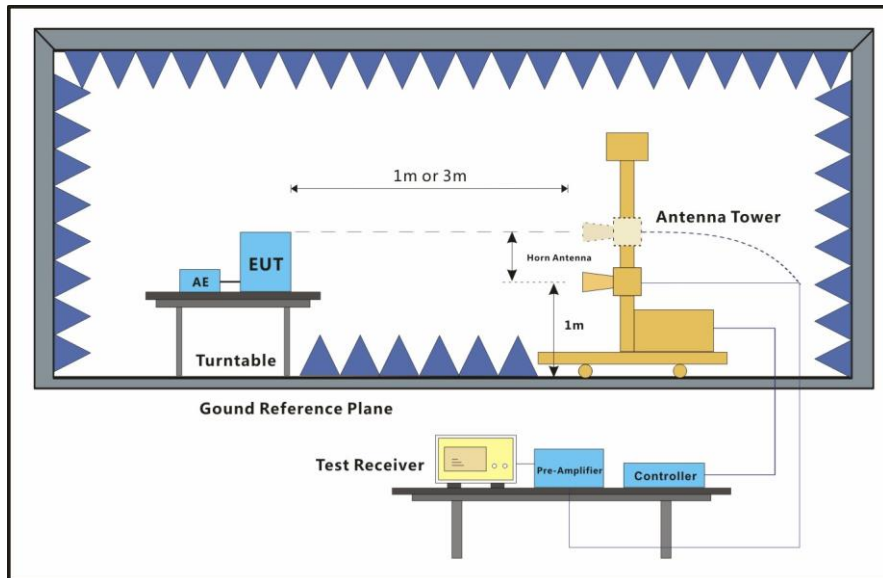

6.2.3 Measurement Data


An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

- 1.Result (dBuV/m) = Reading(dBuV) + Correction Factor (dB/m)
- 2.Correction Factor (dB/m)=Antenna Factor (dB/m)+Cable Loss (dB)- Amplifier (dB)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Mode:a; Polarization:Horizontal

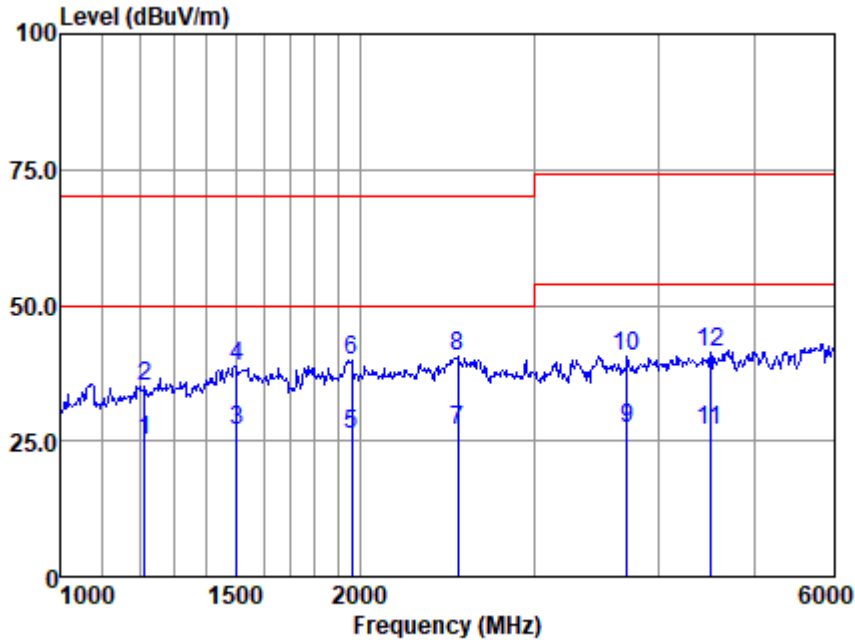


Antenna Polarity :HORIZONTAL
EUT/Project :5830CR
Test mode :a

	Read	Antenna	Cable	Preamp	Emission	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1213.677	37.57	24.63	5.18	42.46	24.92	50.00	-25.08	Average
2	1213.677	47.85	24.63	5.18	42.46	35.20	70.00	-34.80	Peak
3	1503.119	38.52	25.21	5.78	42.43	27.08	50.00	-22.92	Average
4	1503.119	50.26	25.21	5.78	42.43	38.82	70.00	-31.18	Peak
5	1961.004	36.07	25.94	6.56	42.38	26.19	50.00	-23.81	Average
6	1961.004	49.61	25.94	6.56	42.38	39.73	70.00	-30.27	Peak
7	2507.129	33.96	27.42	7.78	42.33	26.83	50.00	-23.17	Average
8	2507.129	47.78	27.42	7.78	42.33	40.65	70.00	-29.35	Peak
9	3714.443	29.80	29.20	10.69	42.38	27.31	54.00	-26.69	Average
10	3714.443	43.18	29.20	10.69	42.38	40.69	74.00	-33.31	Peak
11	4508.136	26.48	30.63	12.14	42.46	26.79	54.00	-27.21	Average
12	4508.136	40.94	30.63	12.14	42.46	41.25	74.00	-32.75	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Mode:a; Polarization:Vertical

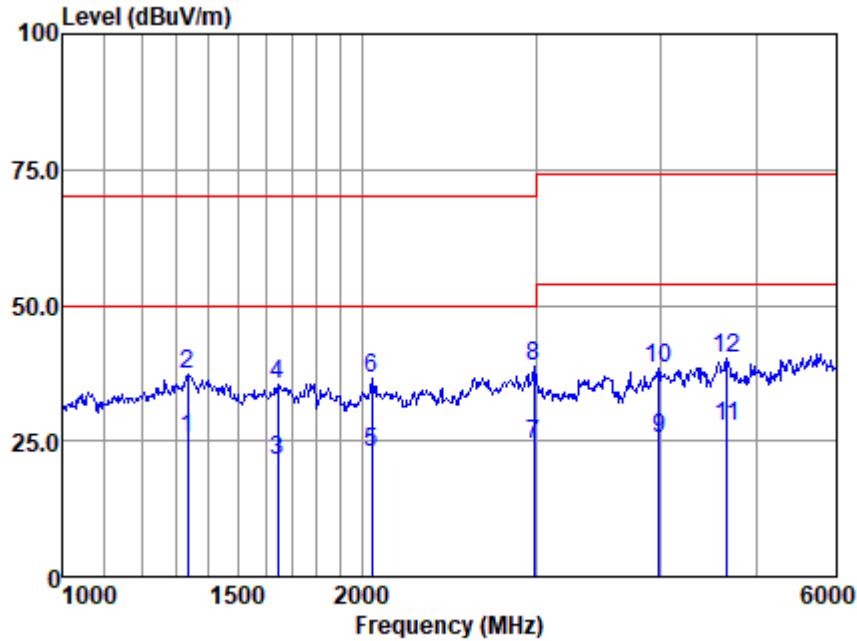

Antenna Polarity :VERTICAL
EUT/Project :5830CR
Test mode :a

	Read	Antenna	Cable	Preamp	Emission	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1335.141	37.53	24.89	5.32	42.45	25.29	50.00	-24.71	Average
2	1335.141	49.35	24.89	5.32	42.45	37.11	70.00	-32.89	Peak
3	1644.019	32.53	25.46	5.98	42.41	21.56	50.00	-28.44	Average
4	1644.019	46.53	25.46	5.98	42.41	35.56	70.00	-34.44	Peak
5	2047.895	32.15	26.15	7.04	42.37	22.97	50.00	-27.03	Average
6	2047.895	45.61	26.15	7.04	42.37	36.43	70.00	-33.57	Peak
7	2981.899	29.68	28.47	8.52	42.30	24.37	50.00	-25.63	Average
8	2981.899	43.96	28.47	8.52	42.30	38.65	70.00	-31.35	Peak
9	3981.257	26.97	29.66	11.21	42.41	25.43	54.00	-28.57	Average
10	3981.257	39.97	29.66	11.21	42.41	38.43	74.00	-35.57	Peak
11	4667.241	25.94	30.95	13.10	42.47	27.52	54.00	-26.48	Average
12	4667.241	38.49	30.95	13.10	42.47	40.07	74.00	-33.93	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



7 Immunity Test Results

7.1 Performance Criteria Description in EN 50130-4:2011 +A1:2014

There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.


For further details, please refer to Clause 7.4, 8.4, 9.4, 10.4, 11.4, 12.4 and 13.4, of EN 50130-4.



7.2 Electrostatic Discharge

Test Requirement: EN 50130-4:2011 +A1:2014
 Test Method: EN 61000-4-2:2009
 Number of Discharge: Minimum 10 times at each test point for Air Discharge
 Minimum 50 times at each test point for Contact or VCP & HCP Discharge
 Discharge Mode: Single Discharge
 Discharge Period: 1 second minimum
 Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

7.2.1 Test Setup Diagram

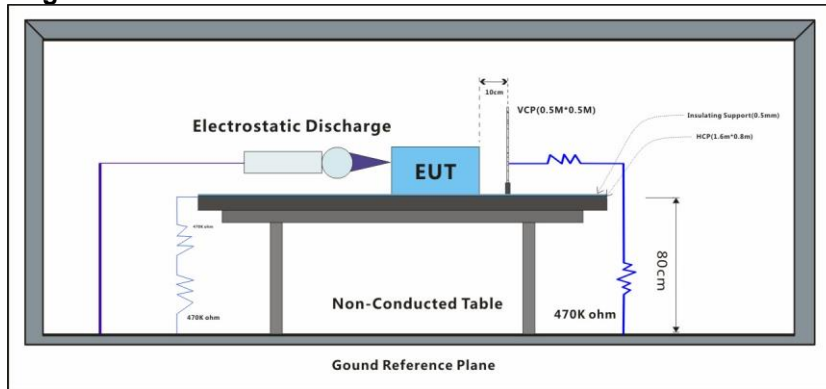

7.2.2 E.U.T. Operation

Operating Environment:
 Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar
 Test mode: a:Normal Working_The Open/Close Sensor, PIR Sensor, Smart button connected with Home Gateway through ZigBee signal, and the Home Gate way connected with the wireless router through WiFi, use the mobile phone connected with the router to observe the status information.

7.2.3 Test Results:

Observations: Test Point:
 1. All insulated enclosure and seams.
 2. All accessible metal parts of the enclosure.
 3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	6	+	2	A
Contact Discharge	6	-	2	A
Horizontal Coupling	6	+	3	A
Horizontal Coupling	6	-	3	A
Vertical Coupling	6	+	3	A
Vertical Coupling	6	-	3	A

Results:

A: No degradation in the performance of the EUT was observed.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.3 Radiated Immunity(80MHz-2.7GHz)

- Test Requirement: EN 50130-4:2011 +A1:2014
 Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010
 Modulation: 80%, 1 kHz Amplitude Modulation
 Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V/m.
 For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V/m, providing:
 a) there is no permanent damage or change to the EUT (e.g. no corruption of memory or changes to programmable settings etc.);
 b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and
 c) there is no observable deterioration of the picture at 1 V/m.

7.3.1 Test Setup Diagram

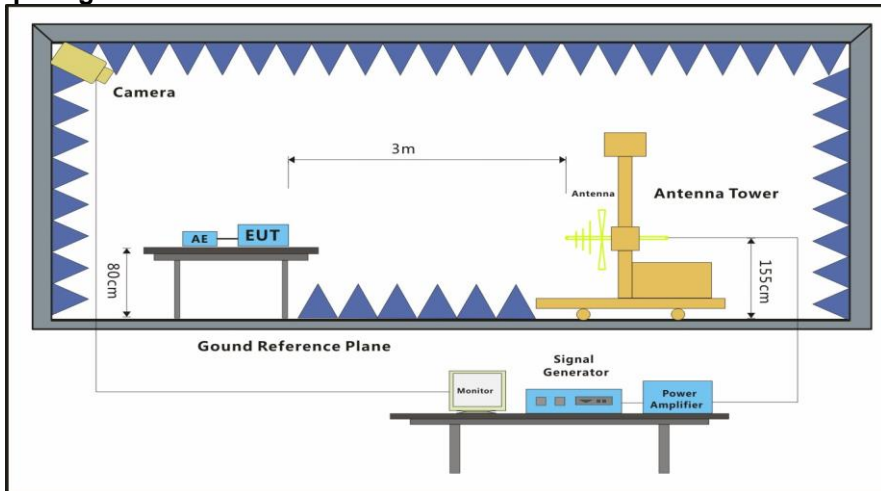

7.3.2 E.U.T. Operation

- Operating Environment:
 Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar
 Test mode: a:Normal Working_The Open/Close Sensor, PIR Sensor, Smart button connected with Home Gateway through ZigBee signal, and the Home Gate way connected with the wireless router through WiFi, use the mobile phone connected with the router to observe the status information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.3.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-2.7GHz	10	Front	3s	A
80MHz-2.7GHz	10	Back	3s	A
80MHz-2.7GHz	10	Left	3s	A
80MHz-2.7GHz	10	Right	3s	A
80MHz-2.7GHz	10	Top	3s	A
80MHz-2.7GHz	10	Underside	3s	A

Results:

A: No degradation in the performance of the EUT was observed.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8 Photographs

8.1 Radiated Emissions (30MHz-1GHz) Test Setup



8.2 Radiated Emissions (above 1GHz) Test Setup



8.3 Electrostatic Discharge Test Setup




8.4 Radiated Immunity(80MHz-2.7GHz) Test Setup






Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



8.5 EUT Constructional Details (EUT Photos)






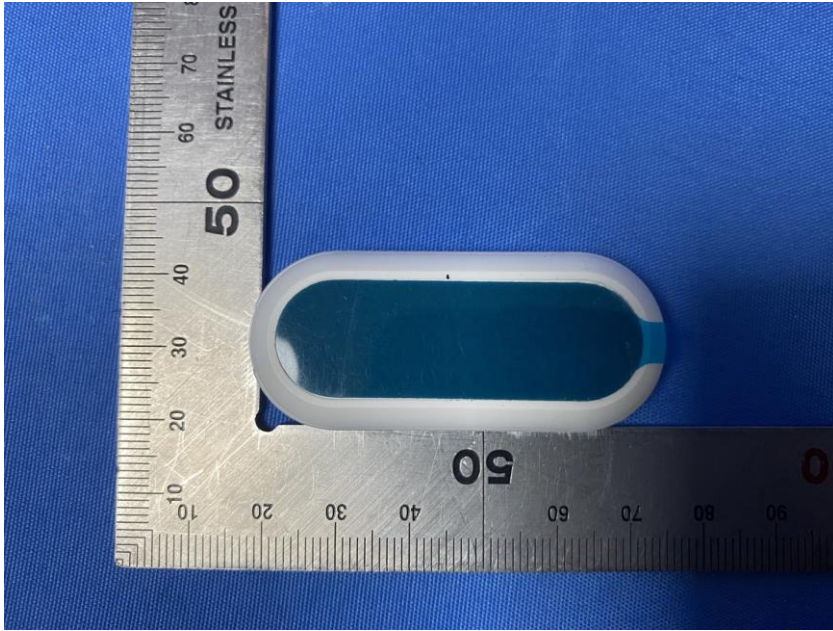


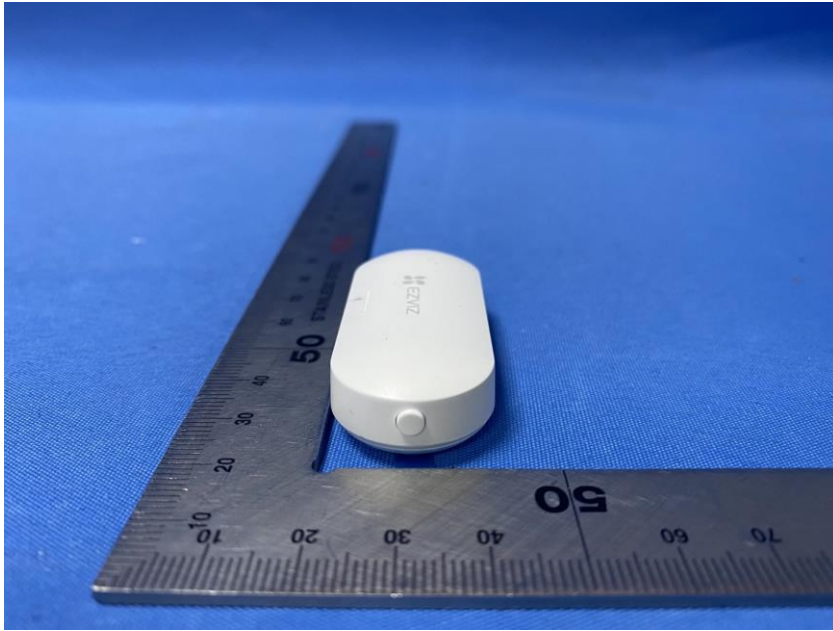

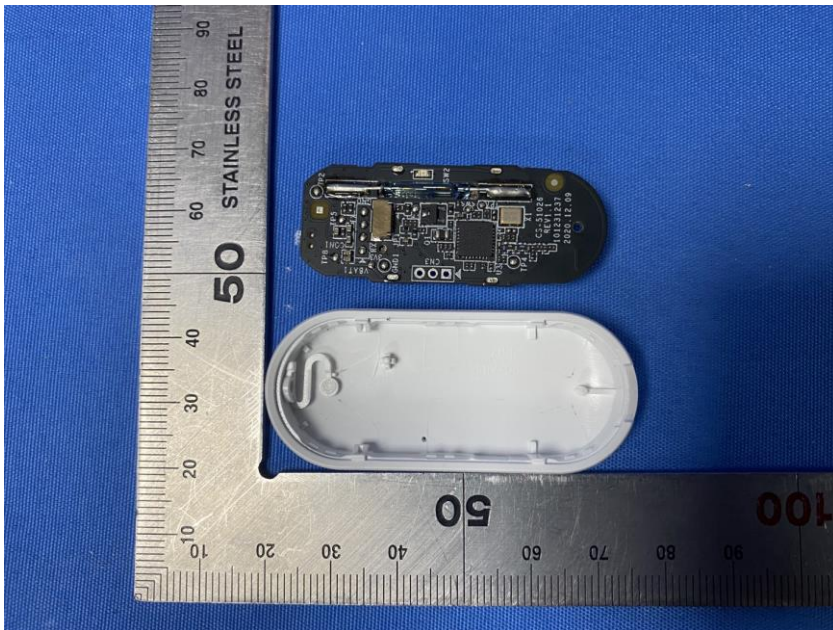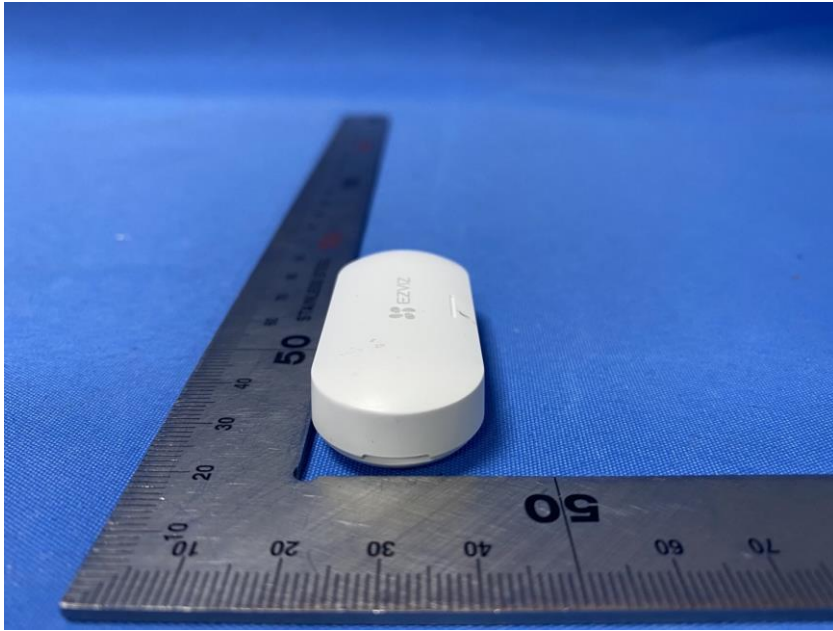

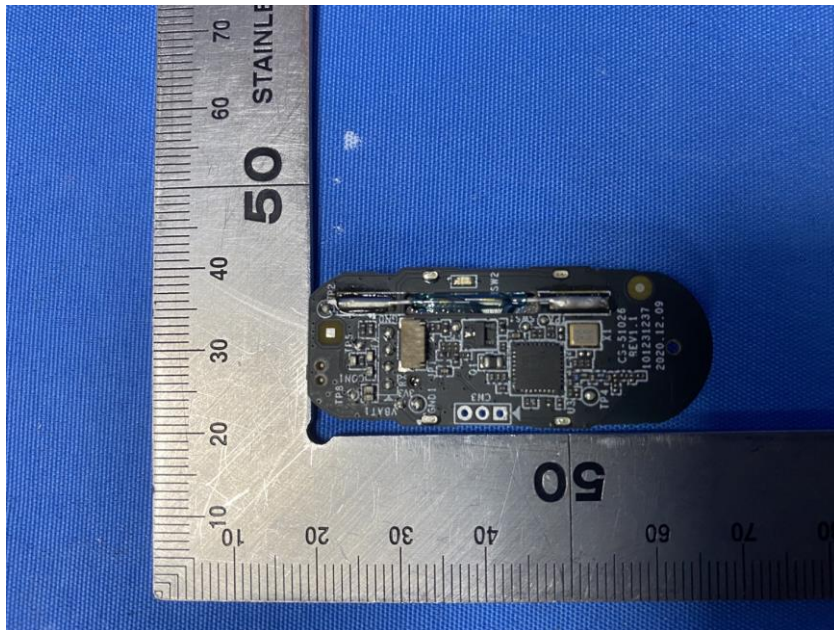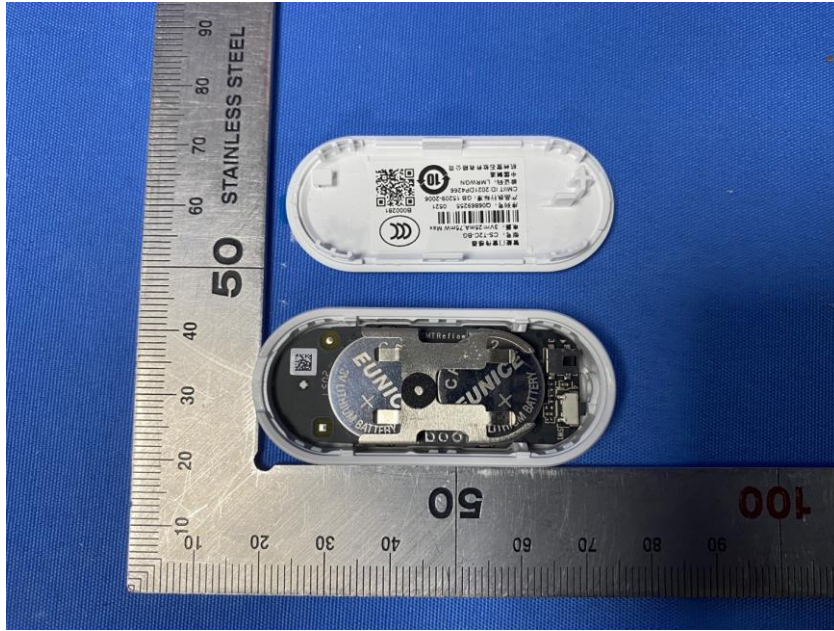

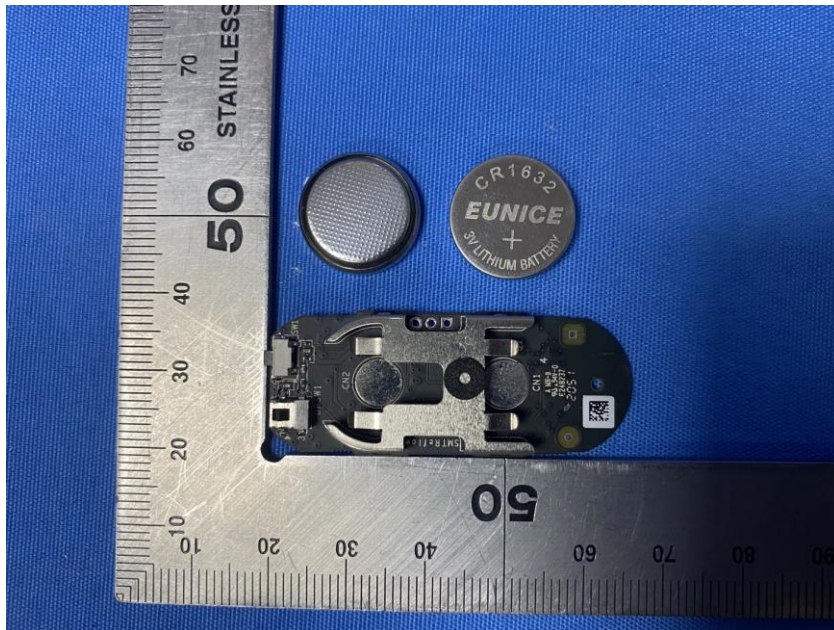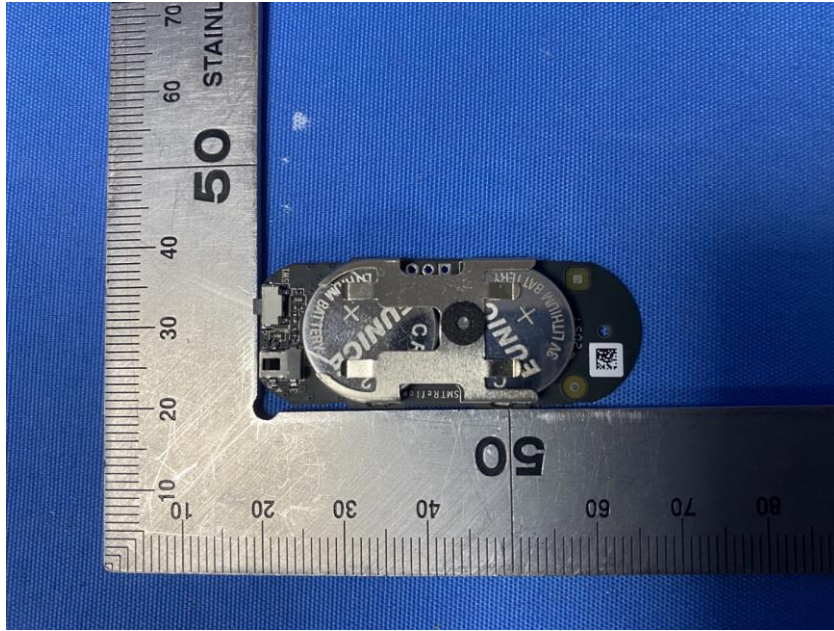

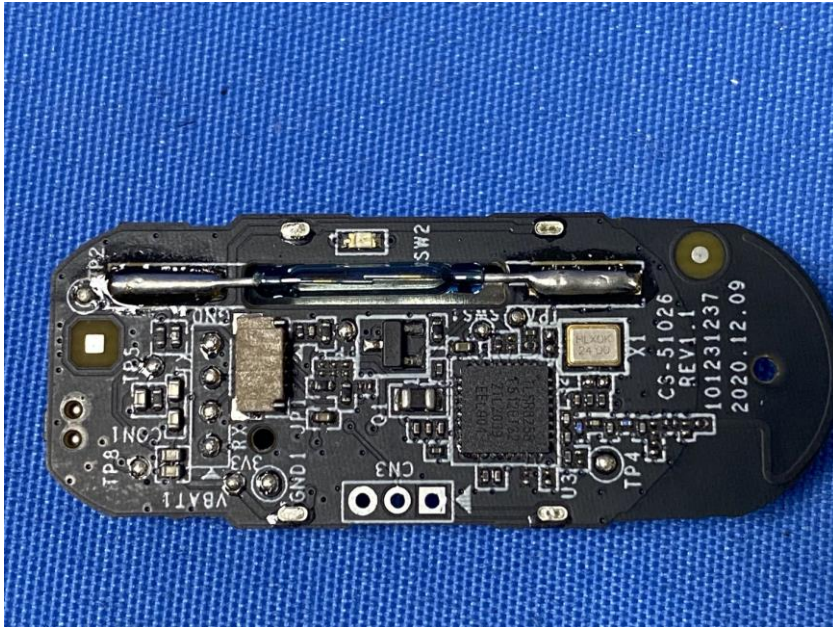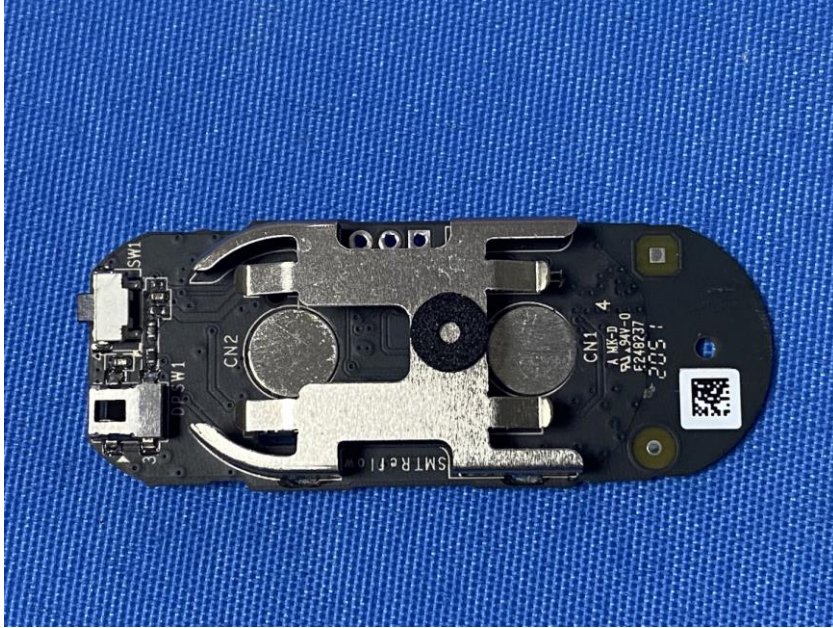

- End of the Report -

