
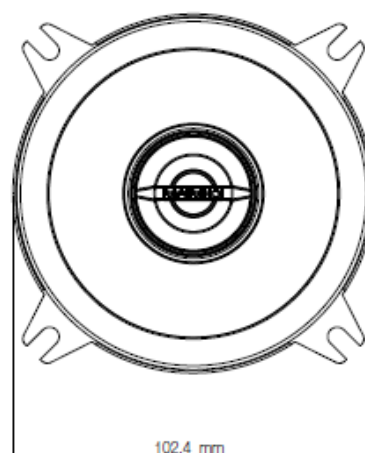
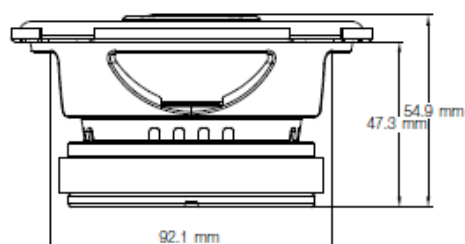
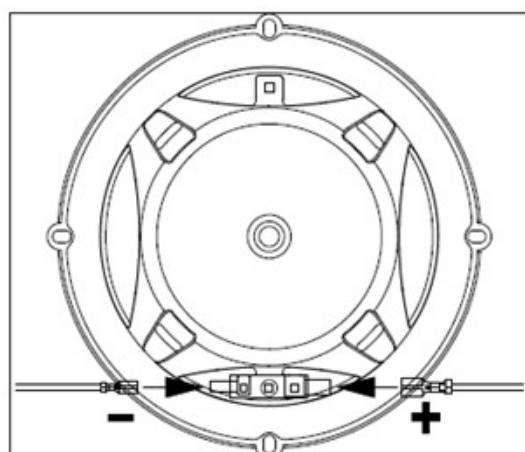
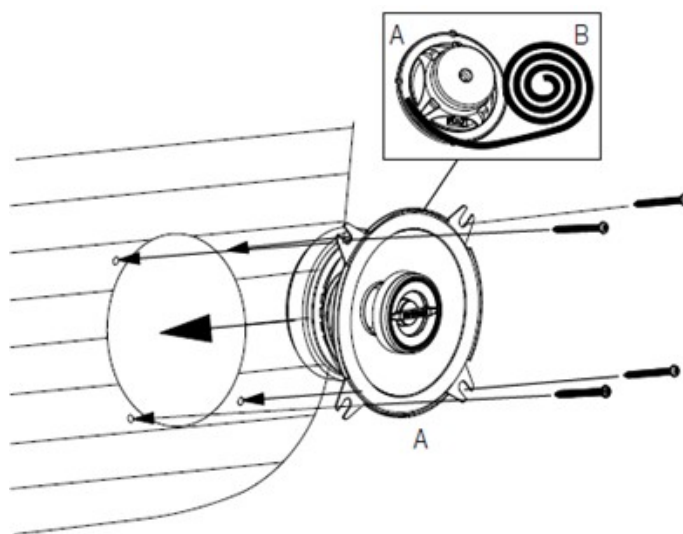


Infinity Reference Speakers

Car Audio Speaker - Installation manual

REF-4032cfx





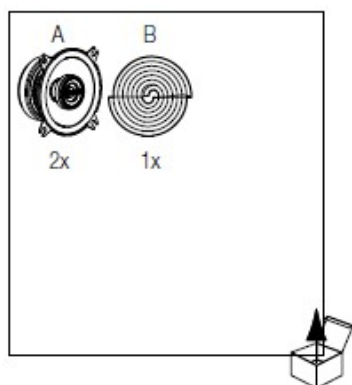


SPECIFICATIONS

REF-4032cfx





Type	4" (100mm) high performance coaxial car speaker
Continuous power handling	35W
Peak power handling	105W
Frequency response	75Hz-21kHz
Nominal impedance	3.0ohms
Sensitivity (2.83V/1m)	92dB
External diameter	4-1/16" (102.4mm)
Mounting cutout diameter	3-11/16" (92.1mm)
Total depth	2-3/16" (54.9mm)
Mounting depth	1-7/8" (47.3mm)



REF-5032cfx

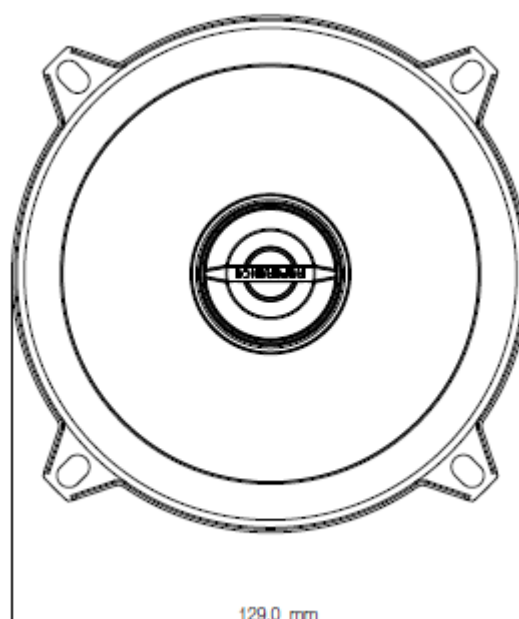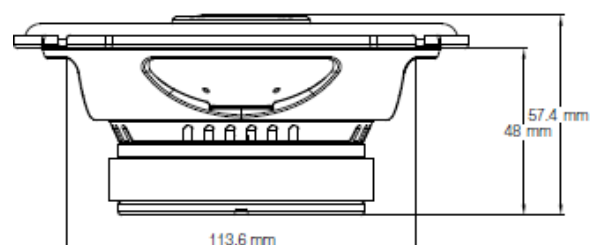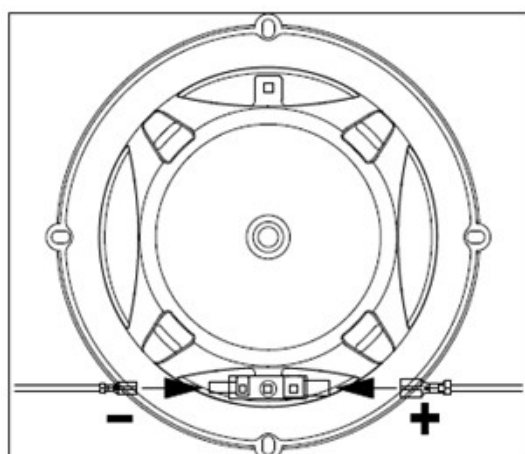
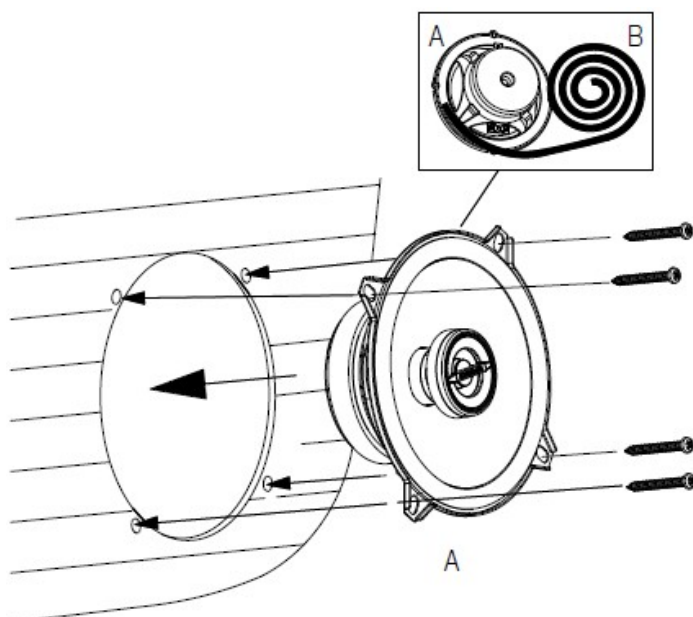
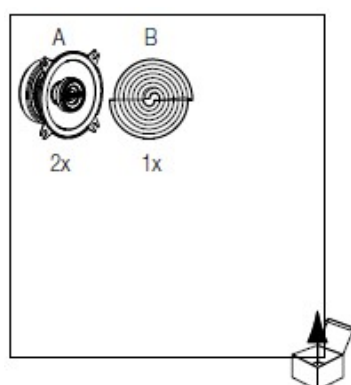


SPECIFICATIONS	REF-5032cfx
Type	5-1/4" (130mm) high performance coaxial car speaker
Continuous power handling	45W
Peak power handling	135W
Frequency response	67Hz-21kHz
Nominal impedance	3.0ohms
Sensitivity (2.83V/1m)	92dB
External diameter	5-1/8" (129mm)
Mounting cutout diameter	4-1/2" (113.6mm)
Total depth	2-5/16" (57.4mm)
Mounting depth	1-15/16" (48mm)

REF-6530cx

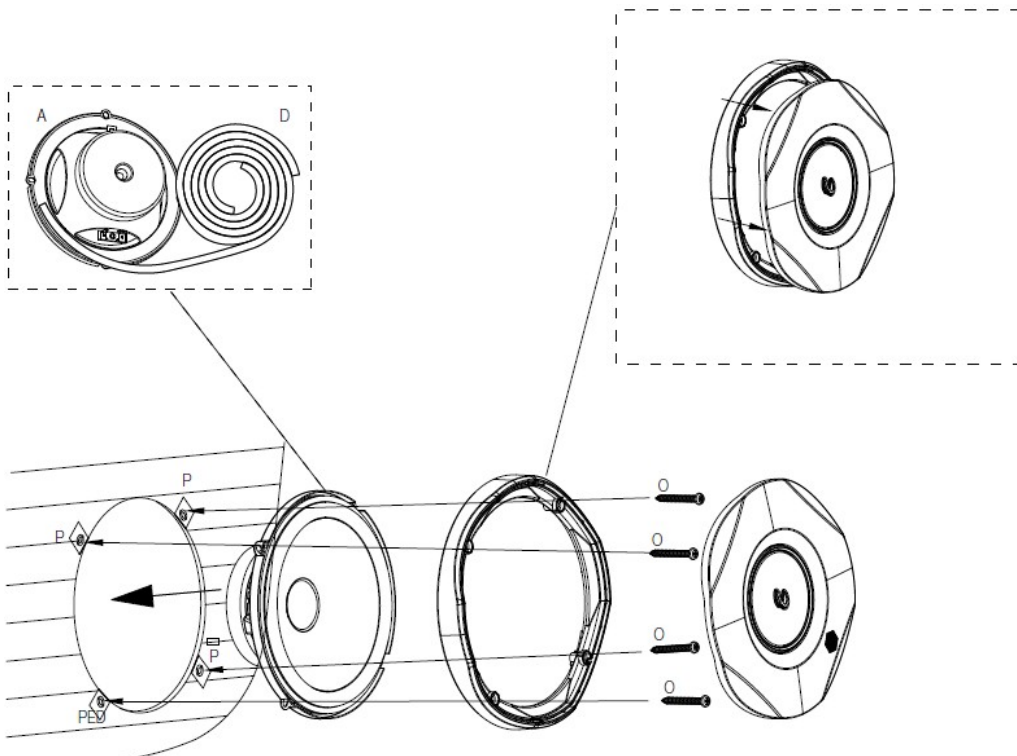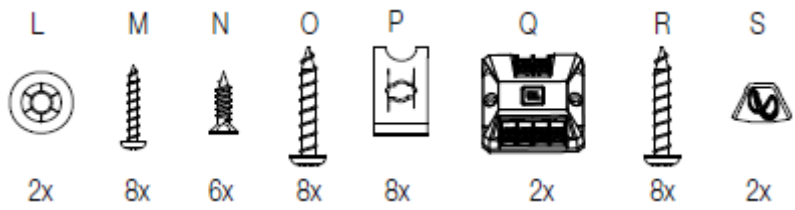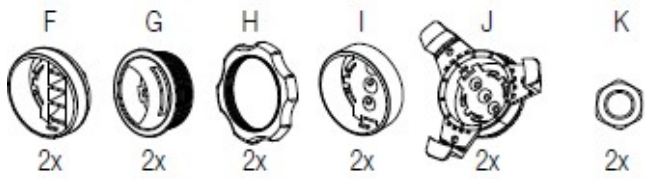
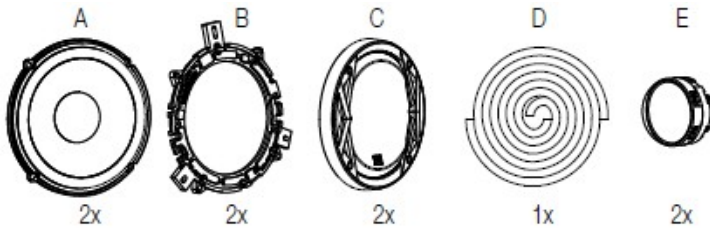




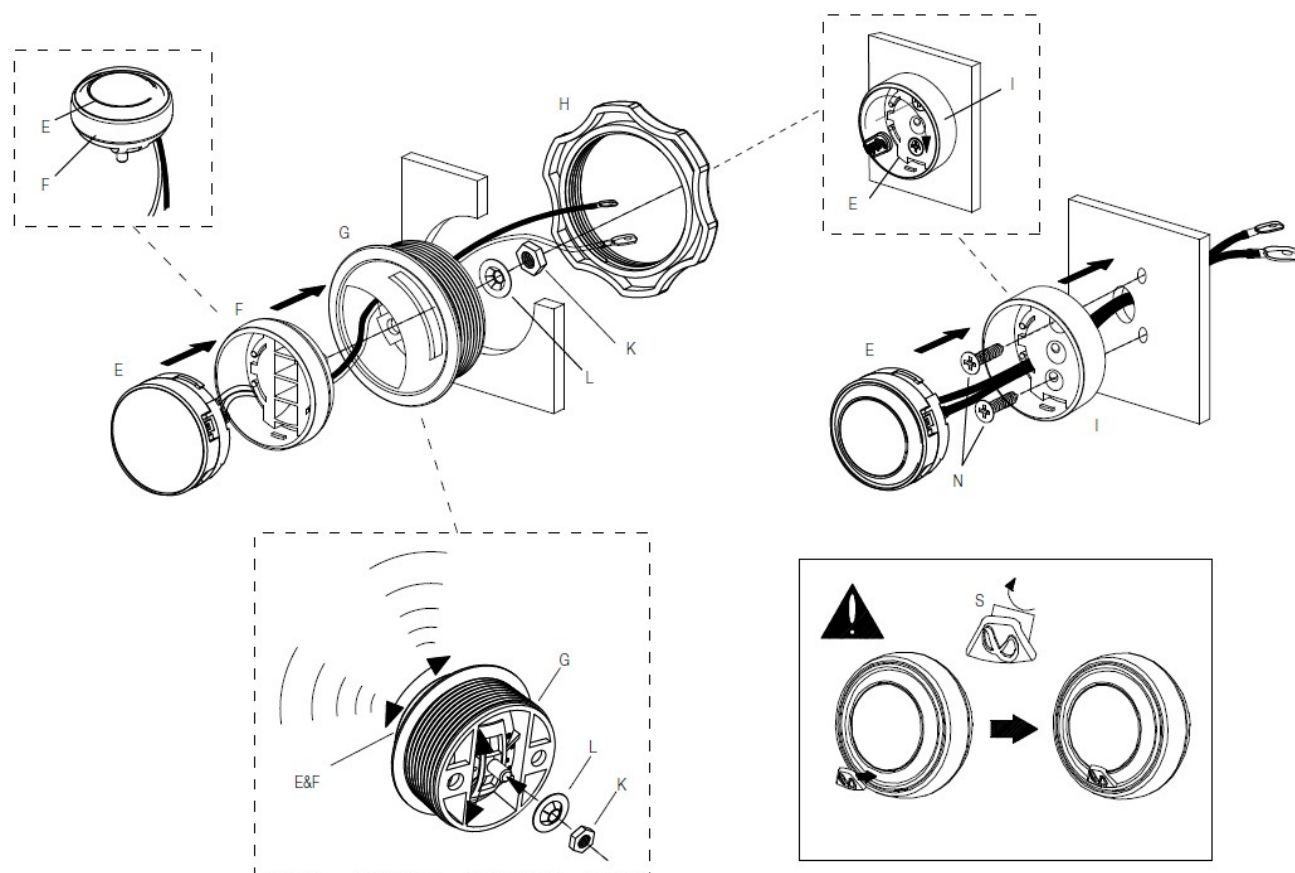
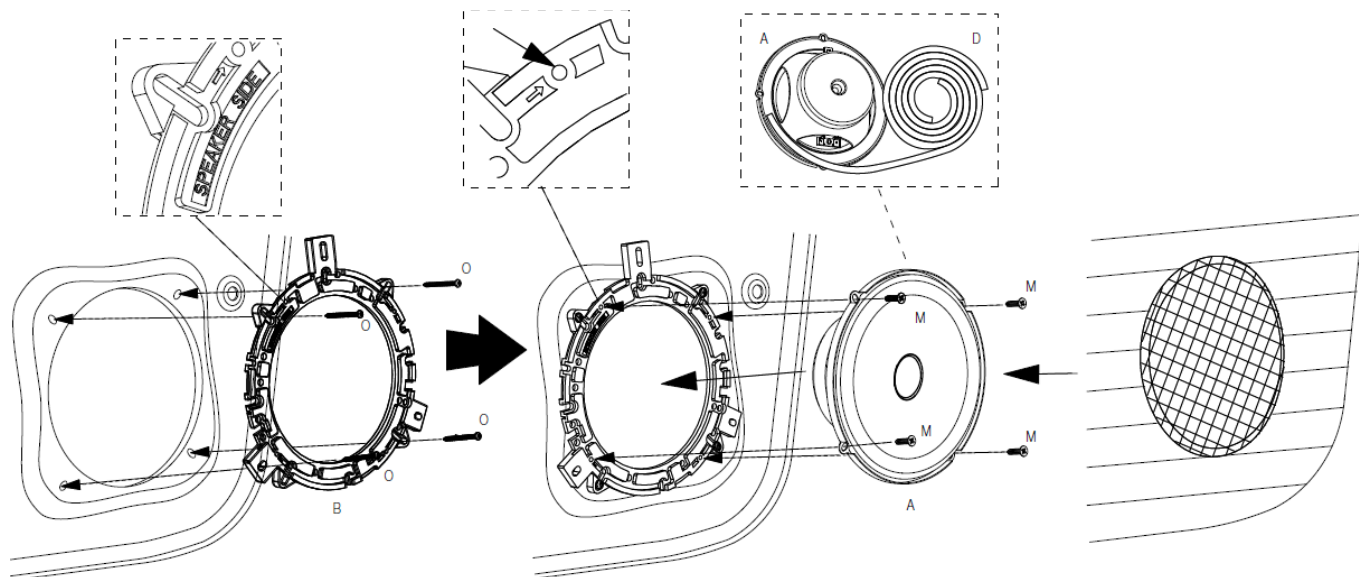


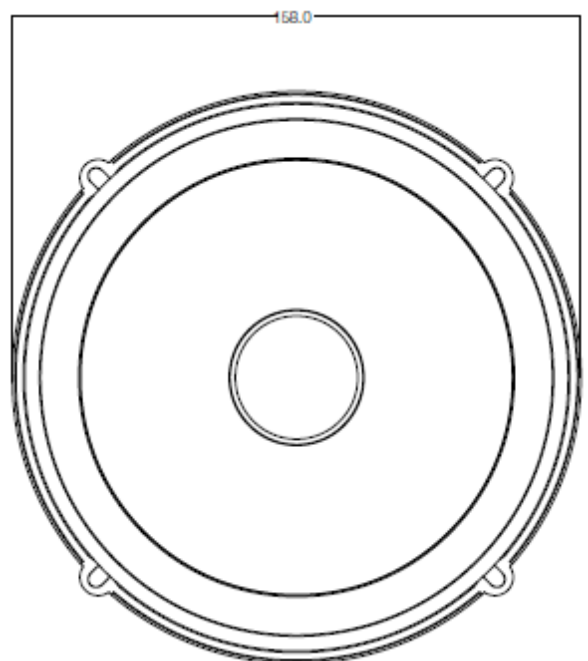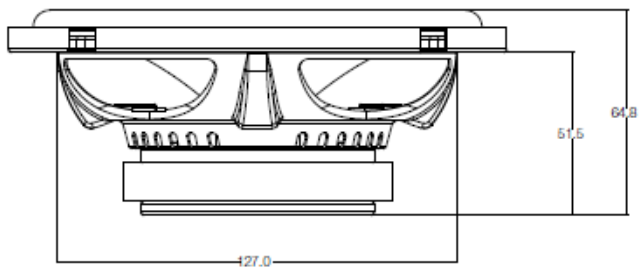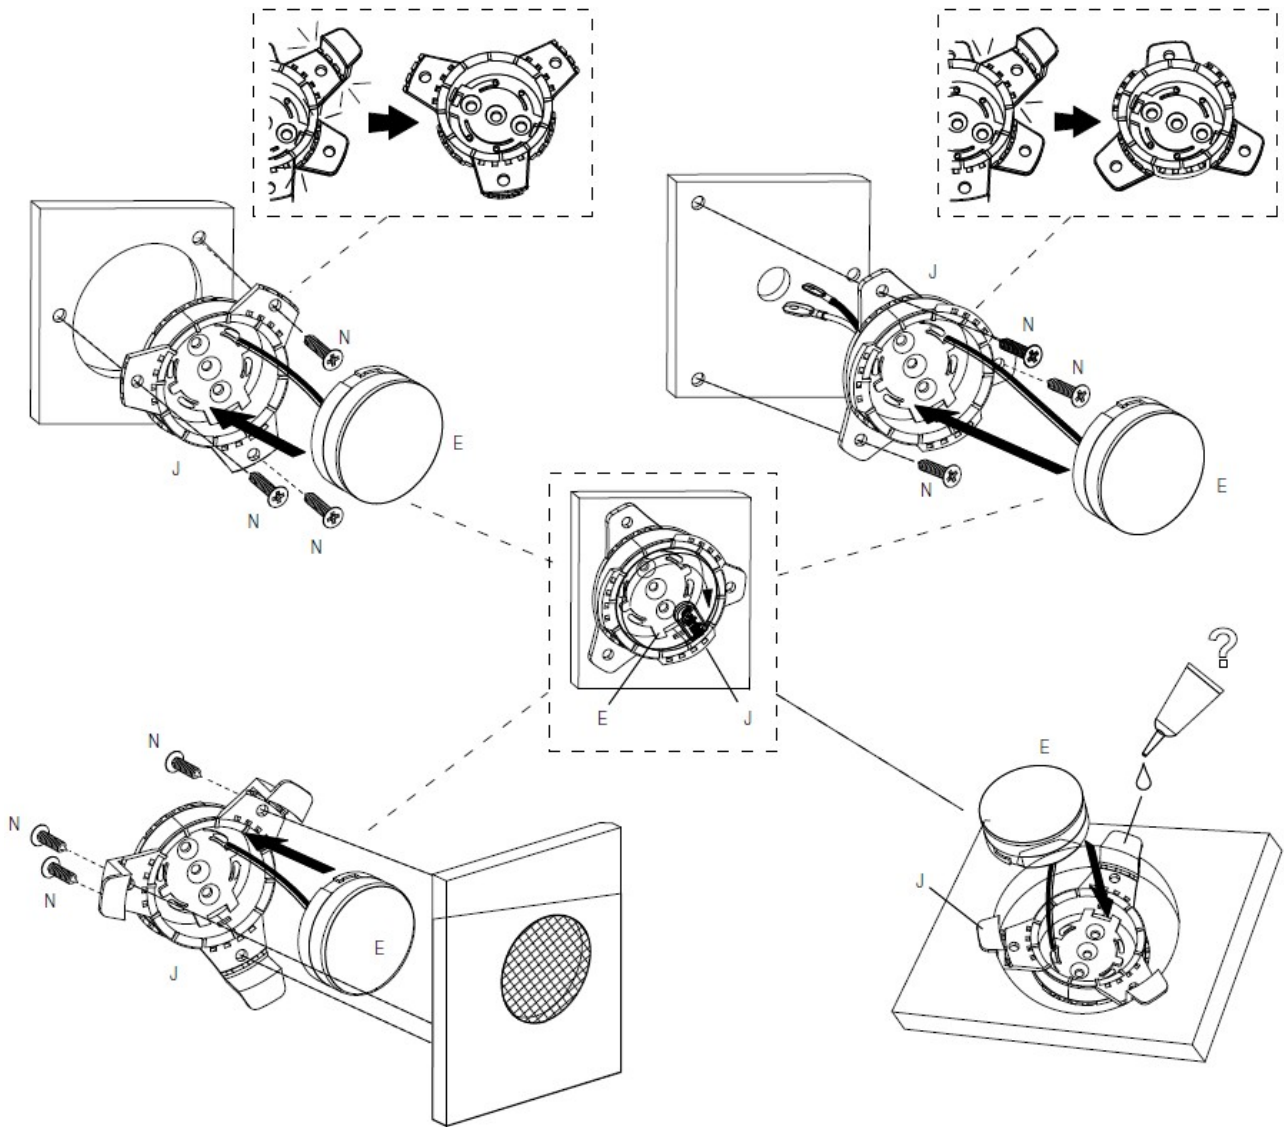

SPECIFICATIONS	REF-6530cx
Type	6-1/2" (160mm) high performance component speaker system
Continuous power handling	90W
Peak power handling	270W
Frequency response	53Hz-21kHz
Nominal impedance	3.0ohms
Sensitivity (2.83V/1m)	93dB
External diameter	6-1/4" (158mm)
Mounting cutout diameter	5" (127mm)
Total depth	2-9/16" (64.8mm)
Mounting depth	2-1/16" (51.5mm)

REF-6532ex

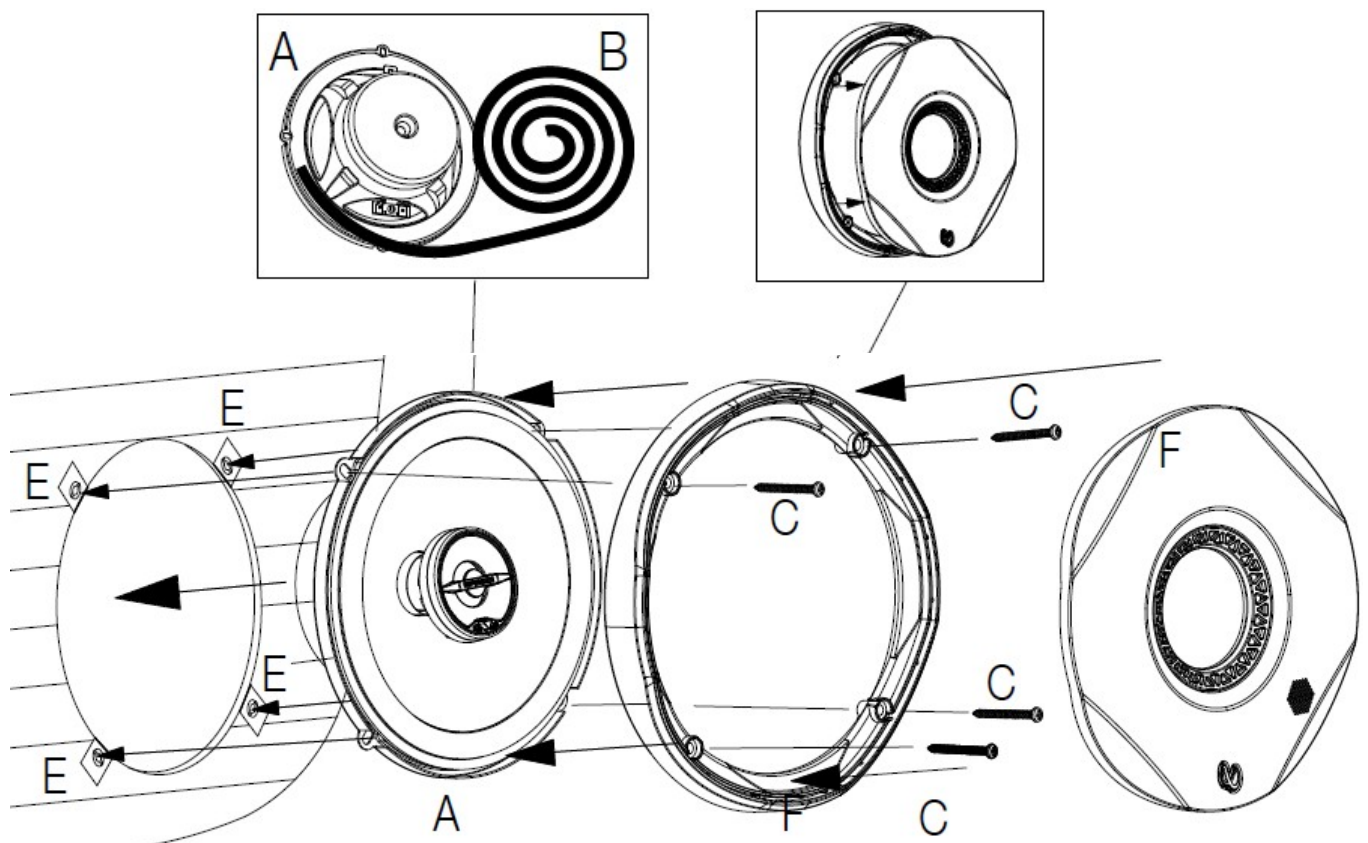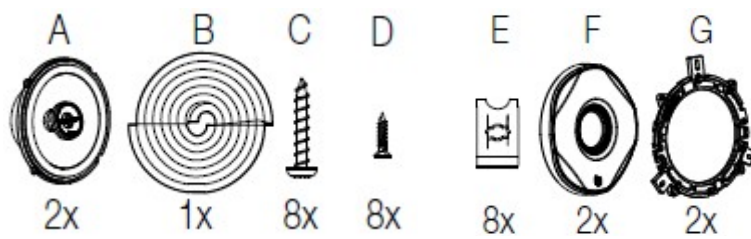

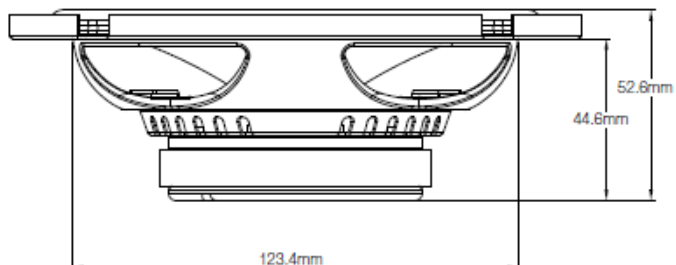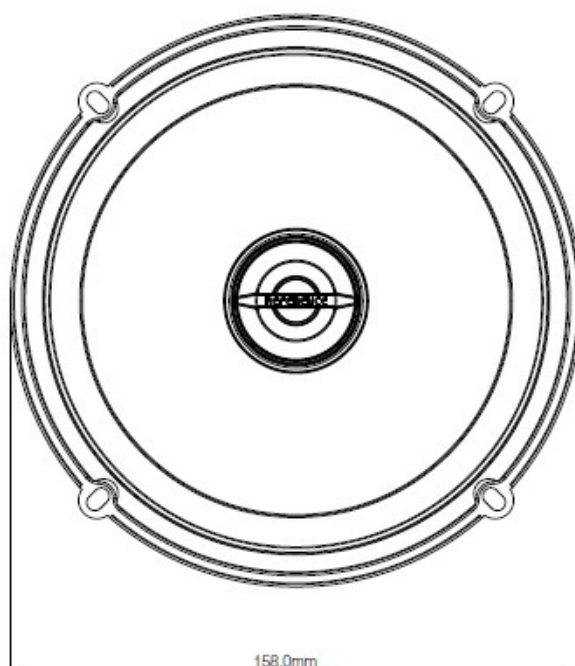
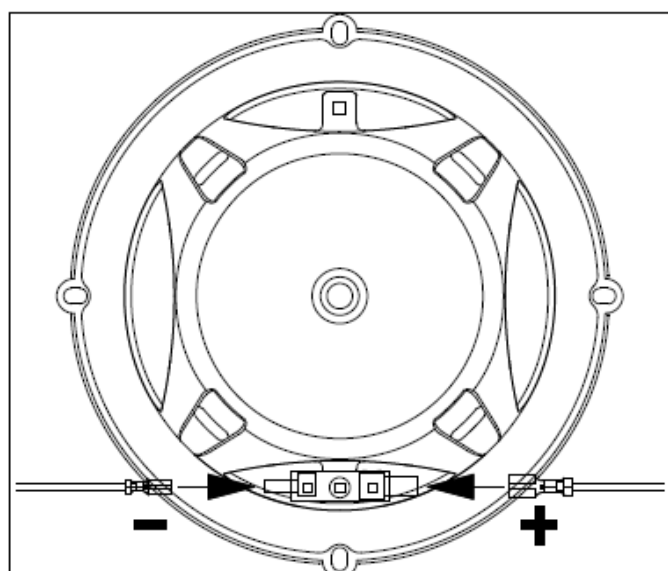
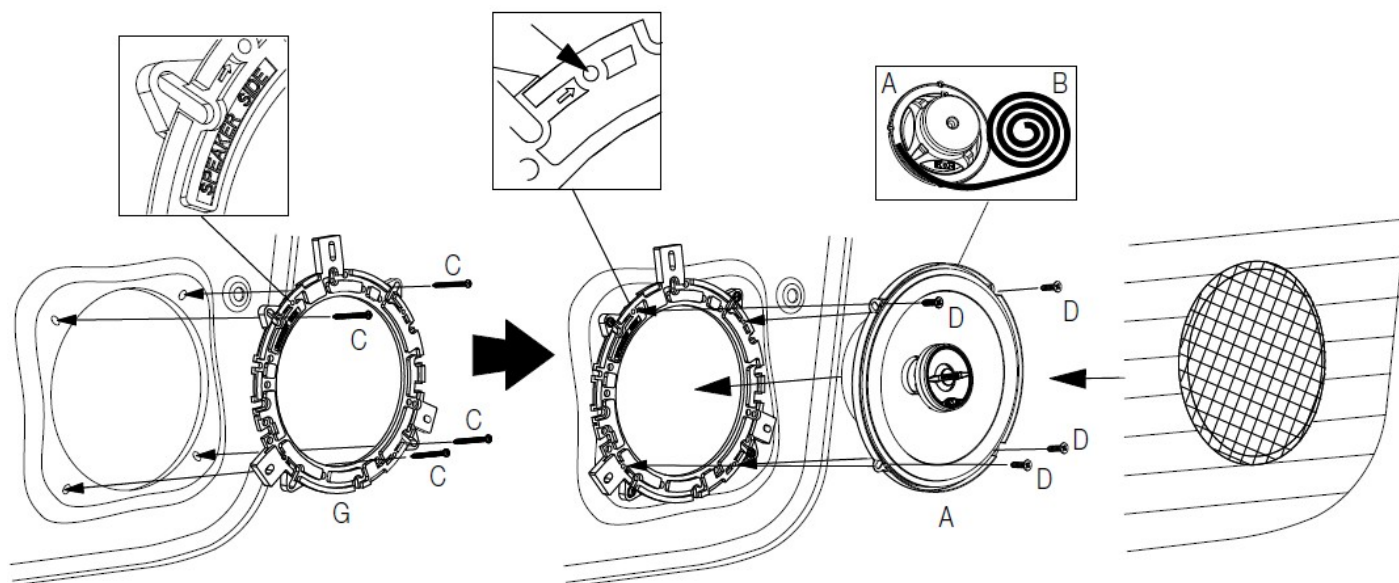



SPECIFICATIONS

REF-6532ex

Type	6-1/2" (160mm) high performance EZFit coaxial car speaker
Continuous power handling	55W
Peak power handling	165W
Frequency response	57Hz-21kHz
Nominal impedance	3.0ohms
Sensitivity (2.83V/1m)	93dB
External diameter	6-1/4" (158mm)
Mounting cutout diameter	4-7/8" (123.4mm)
Total depth	2-1/8" (52.6mm)
Mounting depth	1-13/16" (44.6mm)

REF-9632ix

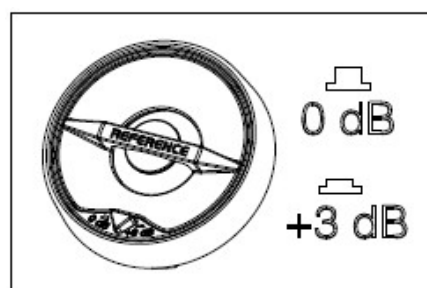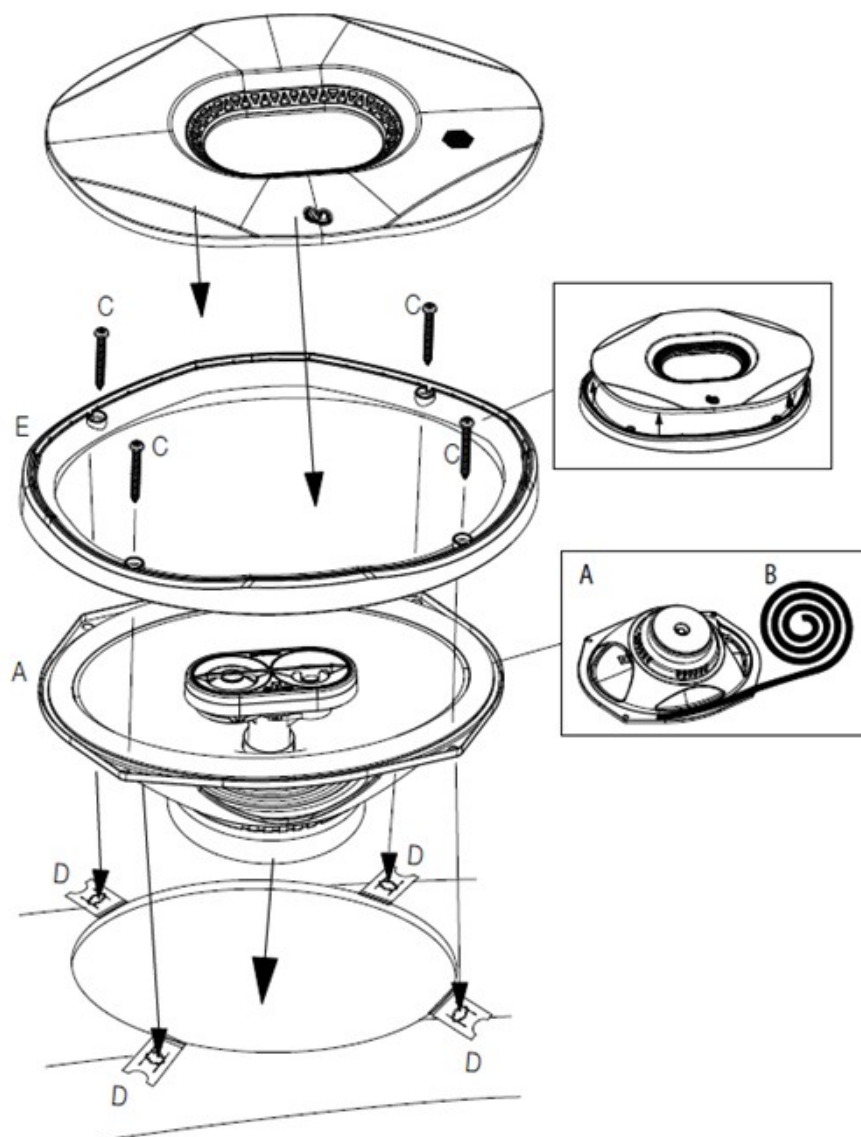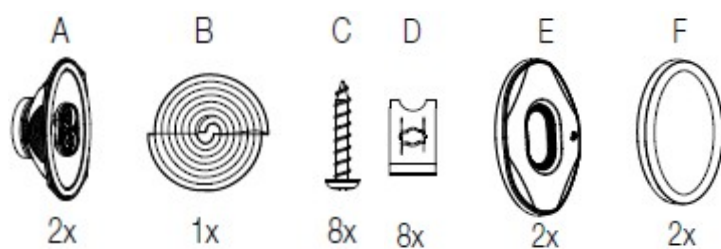

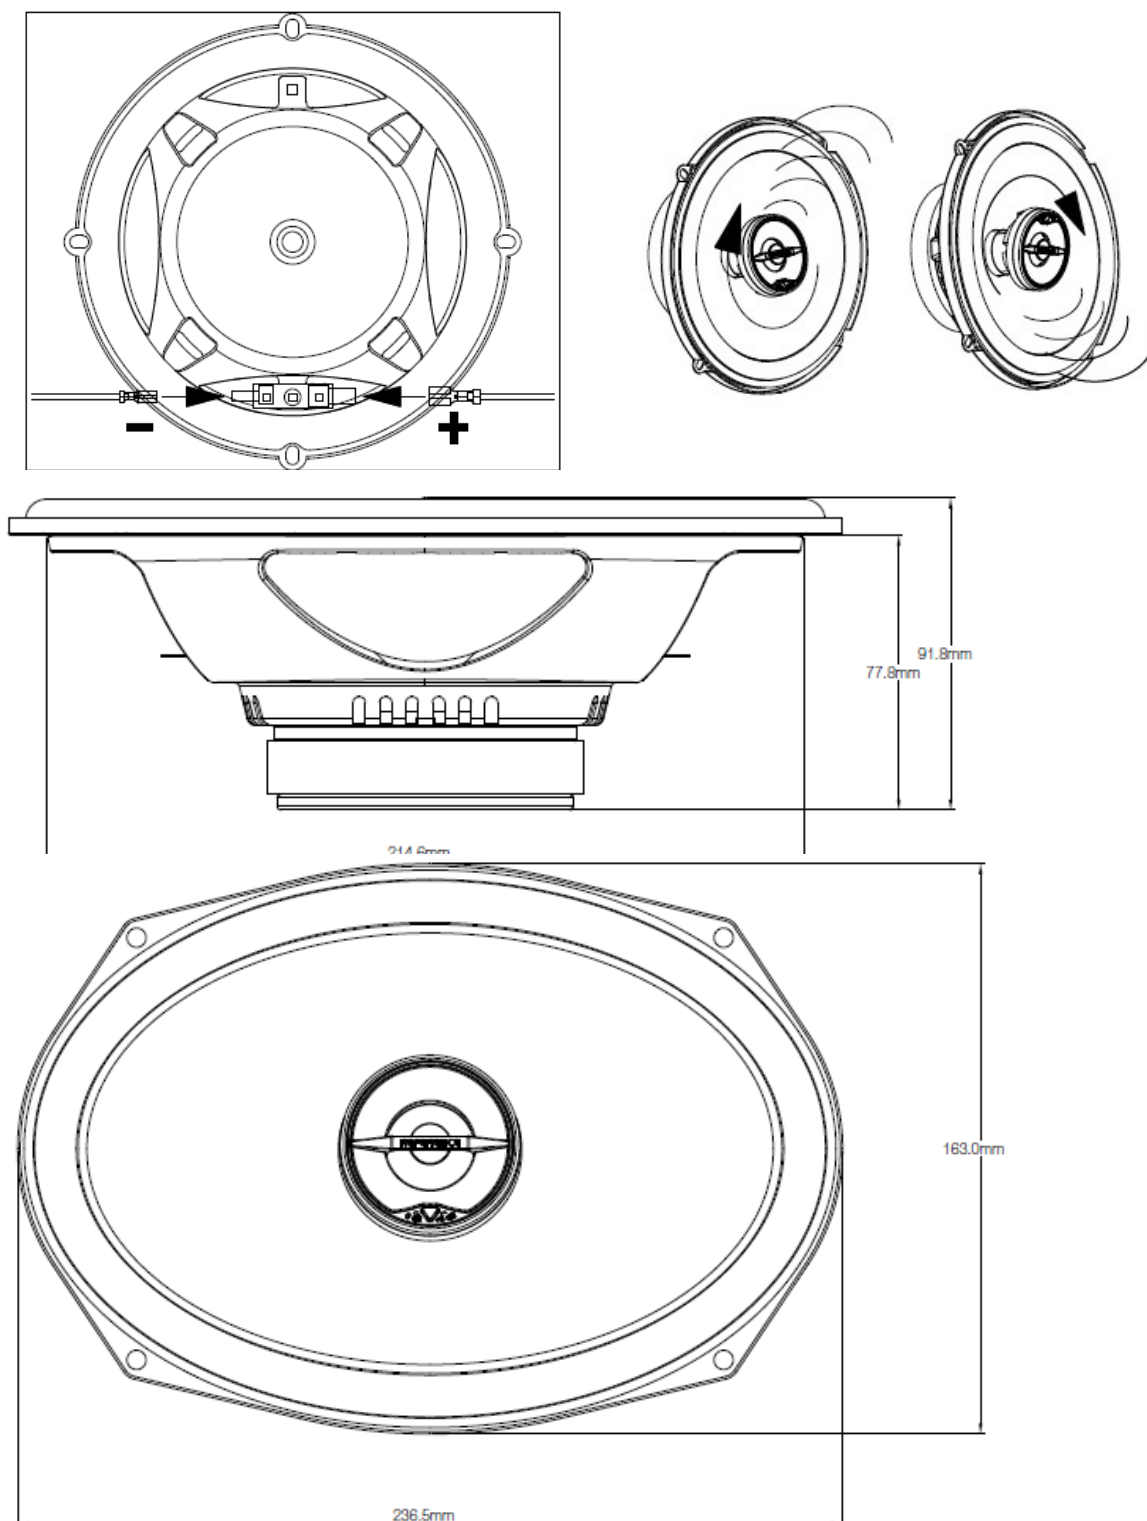

SPECIFICATIONS	REF-0632ix
Type	6" x 9" high performance coaxial car speaker
Continuous power handling	100W
Peak power handling	300W
Frequency response	46Hz - 20kHz
Nominal impedance	3.0ohms
Sensitivity (2.83V/1m)	94dB
External diameter	9-5/16" X 6-7/16" (236.5mm X 163mm)
Mounting cutout diameter	8-1/2" X 5-3/4" (214.6mm X 144.6mm)
Total depth	3-5/8" (91.8mm)
Mounting depth	3-1/8" (77.8mm)