



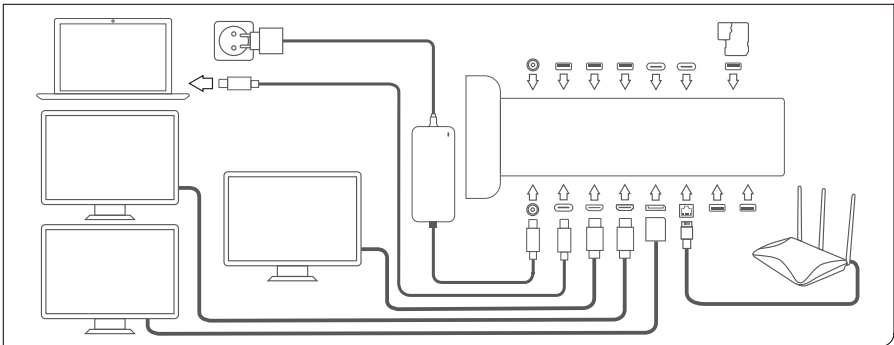

EN

15-in-1 USB-C Docking Station Pro IDO 3000

Content:
1x Docking Station
1x AC Adapter
1x USB-C to USB-C cable, 1m
1x Manual



A: Connect USB-C cable to computer
B: Connect to AC adapter

Note: The Extension screen mode and Mirror screen mode display when external devices are connected to HDMI ports

Multiport Display Output					
MacOS	Extension Mode				
	Mirror Mode				
Windows	Extension Mode				Black screen
	Mirror Mode				

Specifications

3x USB-A 3.1 up to 5 Gbps data transfer and 7.5W power.
2x USB-A 2.0 up to 480 Mbps data transfer and 2.5W power.
2x USB-C 3.1 up to 5 Gbps data transfer and 7.5W power.
1x RJ45 Gigabit Ethernet 10/100/1000 Mbps.
2x HDMI 2.0 Ultra HD resolution up to 4K@60Hz.
1x DisplayPort 1.2 Ultra HD resolution up to 4K@60Hz.
1x 3.5mm audio connector.
1x SD and microSD card reader 60 Mbps data transfer.
1x 1.35W AC adapter, Input: 110-240V~50/60Hz 2.5A(max)
Output: 19.0-21.0VDC, 6.75A/135.0W, 35W power supply for the docking station.
1x USB-C Port for connecting the docking station with the host device (e.g. notebook).
Host device will be charged up to 100W via this port.
Plug & Play no driver software required.
1x USB-C to USB-C cable, 1 m.

Compatibility

Supported OS: MS Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11 and later, Windows Server 2003 / 2008 / 2012 / 2016 and later, (supported are all 32- and 64-bit Windows OS versions), Mac OS X 10.4.x and higher.

Conformity notice

Operation of the device (the devices) may be affected by strong static, electrical or highfrequency fields (radio installations, mobile telephones, microwaves, electrostatic discharges).If this occurs, try increasing the distance from the devices causing the interference.

Disposal

The crossed-out wheelee-bin symbol means that you may not dispose of this product together with general household waste; instead, take it to a recycling point for electrical and electronic equipment. For information about local recycling points, contact your local authority, civic amenity site or the business where you purchased this product. The separate collection and recycling of used items of electrical and electronic equipment prevents any harmful substances they contain from harming human health and polluting the environmen.



For indoor use only

Technical data for AC Adapter
Specifications in accordance with Regulation (EU) 2019/1782

Trade mark of the manufacturer	ISY	
Commercial registration number	HRB 4580	
Address of the manufacturer	Imtron GmbH Media-Saturn-Strasse 1 85053 Ingolstadt Germany	
Model identifier	IDO 3000	
	Value	Unit
Input voltage	100-240	VAC
Input AC frequency	50/60	Hz
Output voltage	9-21	VDC
Output current	6.35	A
Output power	35	W
Average active efficiency	75.1	%
No-load power consumption	0.10	W

IT

Stazione di espansione USB-C pro 15 in 1 IDO 3000

Contenuto:
1x Stazione di espansione
1x Adattatore CA
1x Cavo da USB-C a USB-C, 1m
1x Manuale



A: Collegare il cavo USB-C al computer
B: Collegare all'adattatore CA

Nota: La modalità della schermata Estesa e Specchio sono visualizzate quando sono collegati dispositivi esterni alle porte HDMI

Uscita display multiporta					
MacOS	Modalità Estesa				
	Modalità Specchio				
Windows	Modalità Estesa				Schermata nera
	Modalità Specchio				

Specifiche

3 porte USB-A 3.1 fino a 5 Gbps di trasferimento dati e potenza di 7,5W.
2 porte USB-A 2.0 fino a 480 Mbps di trasferimento dati e potenza di 2,5 W.
2 porte USB-C 3.1 fino a 5 Gbps di trasferimento dati e potenza di 7,5W.
1 attacco RJ45 Gigabit Ethernet 10/100/1000 Mbps.
2 porte HDMI 2.0 con risoluzione Ultra HD fino a 4K@60Hz.
1 porta display 1.2 con risoluzione Ultra HD fino a 4K@60Hz.
1 connettore audio da 3,5mm.
1 lettore di schede SD e microSD con 60 Mbps di trasferimento dati.
1 adattatore CA 135W, ingresso:110-240V~50/60Hz 2.5A(max)
Uscita: 19.0-21.0VDC, 6.75A/135.0W, 35W alimentazione per la stazione di espansione.
1 porta USB-C per il collegamento della stazione di espansione all'host (ad es. notebook).
L'host verrà caricato fino a 100W da questa porta.
Sistema Plug & Play, non sono richiesti driver software.
1 cavo da USB-C a USB-C, 1 m.

Compatibility

Supported OS: MS Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11 and later, Windows Server 2003 / 2008 / 2012 / 2016 and later, (supported are all 32- and 64-bit Windows OS versions), Mac OS X 10.4.x and higher.

Conformity notice

Operation of the device (the devices) may be affected by strong static, electrical or highfrequency fields (radio installations, mobile telephones, microwaves, electrostatic discharges).If this occurs, try increasing the distance from the devices causing the interference.

Disposal

The crossed-out wheelee-bin symbol means that you may not dispose of this product together with general household waste; instead, take it to a recycling point for electrical and electronic equipment. For information about local recycling points, contact your local authority, civic amenity site or the business where you purchased this product. The separate collection and recycling of used items of electrical and electronic equipment prevents any harmful substances they contain from harming human health and polluting the environmen.



Solo per uso interno


Technical data for AC Adapter
Specifications in accordance with Regulation (EU) 2019/1782

Trade mark of the manufacturer	ISY	
Commercial registration number	HRB 4580	
Address of the manufacturer	Imtron GmbH Media-Saturn-Strasse 1 85053 Ingolstadt Germany	
Model identifier	IDO 3000	
	Value	Unit
Input voltage	100-240	VAC
Input AC frequency	50/60	Hz
Output voltage	9-21	VDC
Output current	6.35	A
Output power	35	W
Average active efficiency	75.1	%
No-load power consumption	0.10	W

ES

Base de conexión Pro USB-C 15 en 1 IDO 3000

Contenido:
1 base de conexión
1 adaptador de CA
1 cable de USB-C a USB-C, 1 m
1 manual



A: Conecte el cable USB-C al ordenador
B: Conecte al adaptador de CA

Nota: El modo de pantalla Extensión y el modo de pantalla Espejo aparecen cuando se conectan dispositivos externos a los puertos HDMI

Salida de pantalla multipuerto					
MacOS	Modo Extensión				
	Modo Espejo				
Windows	Modo Extensión				Pantalla negra
	Modo Espejo				

Especificaciones

3 USB-A 3.1 de hasta 5 Gbit/s de transferencia de datos y 7,5 W de potencia.
2 USB-A 2.0 de hasta 480 Mbit/s de transferencia de datos y 2,5 W de potencia.
2 USB-C 3.1 de hasta 5 Gbit/s de transferencia de datos y 7,5 W de potencia.
1 RJ45 Gigabit Ethernet 10/100/1000 Mbit/s.
2 HDMI 2.0 con resolución Ultra HD de hasta 4K a 60 Hz.
1 DisplayPort 1.2 con resolución Ultra HD de hasta 4K a 60 Hz.
1 conector de audio de 3,5 mm.
1 lector de tarjetas SD y microSD de 60 Mbit/s de transferencia de datos.
1 adaptador de 135 W de CA, entrada: 110 a 240 V~50/60 Hz 2.5 A (máx.)
Tensión de salida: 19.0-21.0 V CC, 6.75 A/135.0 W, fuente de alimentación de 35 W para la base de conexión.
1 puerto USB-C para conectar la base de conexión con el dispositivo anfitrión (p. ej., un ordenador portátil).
El dispositivo anfitrión se cargará hasta 100 W a través de este puerto.
Conectar y usar, no requiere controlador de software.
1 cable de USB-C a USB-C, 1 m.

Compatibility

Supported OS: MS Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11 and later, Windows Server 2003 / 2008 / 2012 / 2016 and later, (supported are all 32- and 64-bit Windows OS versions), Mac OS X 10.4.x and higher.

Conformity notice

Operation of the device (the devices) may be affected by strong static, electrical or highfrequency fields (radio installations, mobile telephones, microwaves, electrostatic discharges).If this occurs, try increasing the distance from the devices causing the interference.

Disposal

The crossed-out wheelee-bin symbol means that you may not dispose of this product together with general household waste; instead, take it to a recycling point for electrical and electronic equipment. For information about local recycling points, contact your local authority, civic amenity site or the business where you purchased this product. The separate collection and recycling of used items of electrical and electronic equipment prevents any harmful substances they contain from harming human health and polluting the environmen.



Solo para el uso en interiores


Technical data for AC Adapter
Specifications in accordance with Regulation (EU) 2019/1782

Trade mark of the manufacturer	ISY	
Commercial registration number	HRB 4580	
Address of the manufacturer	Imtron GmbH Media-Saturn-Strasse 1 85053 Ingolstadt Germany	
Model identifier	IDO 3000	
	Value	Unit
Input voltage	100-240	VAC
Input AC frequency	50/60	Hz
Output voltage	9-21	VDC
Output current	6.35	A
Output power	35	W
Average active efficiency	75.1	%
No-load power consumption	0.10	W

FR

Station d'accueil USB-C 15-en-1 Pro IDO 3000

Contenu :
1x station d'accueil
1x adaptateur CA
1x câble USB-C vers USB-C, 1 m
1x manuel



A : Raccorder le câble USB-C à l'ordinateur
B : Établir la connexion avec l'adaptateur CA

Remarque : Les modes d'écran d'extension et d'écran miroir apparaissent lorsque des périphériques externes sont raccordés aux ports HDMI

Sortie d'écran multiport					
MacOS	Mode d'extension				
	Mode miroir				
Windows	Mode d'extension				Écran noir
	Mode miroir				

Caractéristiques

3x ports USB-A 3.1 assurant une transmission des données jusqu'à 5 Gbits/s et une puissance de 7,5 W.
2x ports USB-A 2.0 assurant une transmission des données jusqu'à 480 Mbits/s et une puissance de 2,5 W.
2x ports USB-C 3.1 assurant une transmission des données jusqu'à 5 Gbits/s et une puissance de 7,5 W.
1x port RJ45 Gigabit Ethernet 10/100/1 000 Mbits/s.
2x ports HDMI 2.0 pour une résolution Ultra HD jusqu'à 4K à 60 Hz.
1x port DisplayPort 1.2 pour une résolution Ultra HD jusqu'à 4K à 60 Hz.
1x connecteur audio 3,5 mm.
1x lecteur de carte SD et microSD assurant une transmission des données jusqu'à 60 Mbits/s.
1x adaptateur CA 135 W, Entrée :110-240 V~ 50/60 Hz 2,5 A (max.)
Sortie : 19,0-21,0 VCC, 6,75 A/135,0 W, alimentation de 35 W pour la station d'accueil.
1x port USB-C pour connecter la station d'accueil à l'appareil hôte (notebook p. ex.).
Ce port permet une charge de l'appareil hôte pouvant aller jusqu'à 100 W.
Plug & Play, aucun pilote requis.
1x câble USB-C vers USB-C, 1 m.

Compatibilité

Supported OS: MS Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11 and later, Windows Server 2003 / 2008 / 2012 / 2016 and later, (supported are all 32- and 64-bit Windows OS versions), Mac OS X 10.4.x and higher.

Conformity notice

Operation of the device (the devices) may be affected by strong static, electrical or highfrequency fields (radio installations, mobile telephones, microwaves, electrostatic discharges).If this occurs, try increasing the distance from the devices causing the interference.

Disposal


The crossed-out wheelee-bin symbol means that you may not dispose of this product together with general household waste; instead, take it to a recycling point for electrical and electronic equipment. For information about local recycling points, contact your local authority, civic amenity site or the business where you purchased this product. The separate collection and recycling of used items of electrical and electronic equipment prevents any harmful substances they contain from harming human health and polluting the environmen.



Usage intérieur uniquement

Technical data for AC Adapter
Specifications in accordance with Regulation (EU) 2019/1782

Trade mark of the manufacturer	ISY	
Commercial registration number	HRB 4580	
Address of the manufacturer	Imtron GmbH Media-Saturn-Strasse 1 85053 Ingolstadt Germany	
Model identifier	IDO 3000	
	Value	Unit
Input voltage	100-240	VAC
Input AC frequency	50/60	Hz
Output voltage	9-21	VDC
Output current	6.35	A
Output power	35	W
Average active efficiency	75.1	%
No-load power consumption	0.10	W

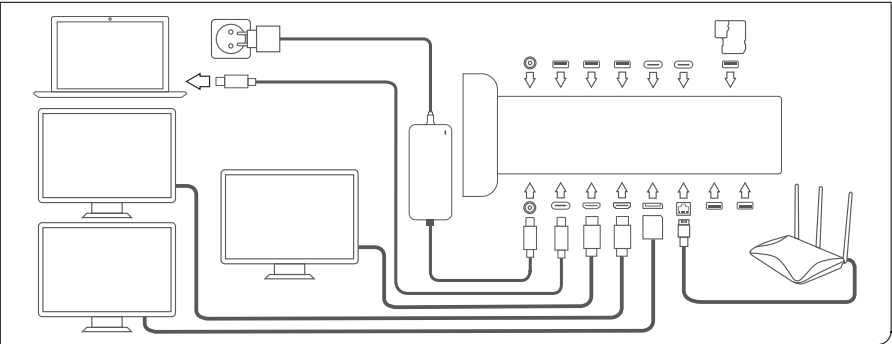


HU

15 az 1-ben USB-C Docking Station Pro dokkolóállomás
IDO 3000

Tartalom:

- 1 db dokkolóállomás
- 1 db váltakozófeszültségű adapter
- 1 db USB-C – USB-C kábel, 1m
- 1 db kézikönyv

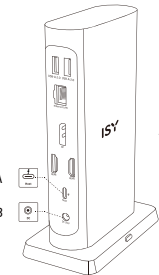

A: USB-C kábel csatlakoztatása számítógéphez
B: Váltakozófeszültségű adapterhez való csatlakoztatás

Megjegyzés: A Képernyő kiterjesztési üzemmód és a Képernyő-tükrözés üzemmód akkor jelenik meg, amikor külső eszközök vannak csatlakoztatva a HDMI-portokhoz

Többportos kijelző kimenet				
Mac OS	Kiterjesztési üzemmód		4K@60Hz	4K@60Hz
			4K@60Hz	4K@60Hz
	Tükrözés üzemmód		4K@30Hz	4K@30Hz
			4K@30Hz	4K@30Hz
Windows	Kiterjesztési üzemmód		4K@60Hz	4K@60Hz
			4K@60Hz	Fekete képernyő
	Tükrözés üzemmód		4K@30Hz	4K@30Hz
			4K@30Hz	4K@30Hz

Specifikációk

3 db USB-A 3.1 kimenet, akár 5 Gbps adatátvitel és 7,5 W teljesítmény.
2 db USB-A 2.0 kimenet, akár 480 Mbps adatátvitel és 2,5W teljesítmény.
2 db USB-C 3.1 kimenet, akár 5 Gbps adatátvitel és 7,5 W teljesítmény.
1 db RJ45 Gigabit Ethernet, 10/100/1000 Mbps.
2 db HDMI 2.0 kimenet ultra-HD felbontással, akár 4K@60 Hz-en.
1 db DisplayPort 1.2 képernyőkimenet ultra-HD felbontással, akár 4K@60 Hz-en.
1 db 3,5 mm-es audio-csatlakozó.
1 db SD és micro-SD kártyaolvasó, akár 60 Mbps adatátvitel.
1 db 135 W-os AC adapter, bemenet: 110-240 V ~ 50/60 Hz 2,5 A (max.)
Kimenet: 19,0-21,0 VDC, 6,75 A/135,0 W, 35 W tápellátás a dokkolóállomáshoz.
1 db USB-C port a dokkolóállomás gazdaiszközökhöz (pl. notebookhoz) való csatlakoztatásáa.
A gazdaiszköz akár 100 W teljesítményig tud feltölteni ezen a porton keresztül.
Plug & Play, illesztőprogram nem szükséges.
1 db USB-C – USB-C kábel, 1m.

Compatibility

Supported OS: MS Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11 and later, Windows Server 2003 / 2008 / 2012 / 2016 and later, (supported are all 32- and 64-bit Windows OS versions), Mac OS X 10.4.x and higher.

Conformity notice

Operation of the device (the devices) may be affected by strong static, electrical or highfrequency fields (radio installations, mobile telephones, microwaves, electrostatic discharges).If this occurs, try increasing the distance from the devices causing the interference.

Disposal

The crossed-out wheelie-bin symbol means that you may not dispose of this product together with general household waste; instead, take it to a recycling point for electrical and electronic equipment. For information about local recycling points, contact your local authority, civic amenity site or the business where you purchased this product. The separate collection and recycling of used items of electrical and electronic equipment prevents any harmful substances they contain from harming human health and polluting the environmen.

Csak beltéri használatra

Technical data for AC Adapter
Specifications in accordance with Regulation (EU) 2019/1782


Trade mark of the manufacturer	ISY	
Commercial registration number	HRB 4580	
Address of the manufacturer	Imtron GmbH Media-Saturn-Strasse 1 85053 Ingolstadt Germany	
Model identifier	IDO 3000	
	Value	Unit
Input voltage	100-240	VAC
Input AC frequency	50/60	Hz
Output voltage	9-21	VDC
Output current	6.35	A
Output power	35	W
Average active efficiency	75.1	%
No-load power consumption	0.10	W

NL

15-in-1 USB-C Docking Station Pro
IDO 3000

Inhoud:

- 1 x Docking Station
- 1 x AC-adapter
- 1 x USB-C naar USB-C-kabel, 1 m
- 1 x Handleiding

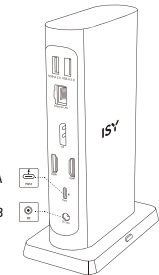

A: USB-C-kabel aansluiten op computer
B: Aansluiten op AC-adapter

Let op: De Uitbreidingsschermmodus en Spiegelschermmodus worden weergegeven wanneer externe apparaten worden aangesloten op HDMI-poorten

Mulitport Display-uitgang				
Mac OS	Uitbreidingsmodus		4K@60Hz	4K@60Hz
			4K@60Hz	4K@60Hz
	Spiegelmodus		4K@30Hz	4K@30Hz
			4K@30Hz	4K@30Hz
Windows	Uitbreidingsmodus		4K@60Hz	4K@60Hz
			4K@60Hz	Zwart scherm
	Spiegelmodus		4K@30Hz	4K@30Hz
			4K@30Hz	4K@30Hz

Specificaties

3x USB-A 3.1 tot 5 Gbps dataoverdracht en 7,5W vermogen.
2x USB-A 2.0 tot 480 Mbps dataoverdracht en 2,5 W vermogen.
2x USB-C 3.1 tot 5 Gbps dataoverdracht en 7,5W vermogen.
1x RJ45 Gigabit Ethernet 10/100/1000 Mbps.
2x HDMI 2.0 Ultra HD resolutie tot 4K@60Hz.
1x DisplayPort 1.2 Ultra HD resolutie tot 4K@60Hz.
1 x 3,5 mm audio connector.
1x SD en microSD-kaartlezer tot 60 Mbps dataoverdracht.
1x 135W AC-adapter, ingang:110-240V~50/60Hz 2,5A(max.)
Uitgang: 19,0-21,0VDC, 6,75A/135,0W, 35W voeding voor het dockingstation.
1x USB-C poort om het dockingstation met het hostapparaat (bijv. notebook) te verbinden.
Hostapparaat wordt via deze poort opgeladen tot 100W.
Plug & Play, geen stuurprogramma vereist.
1x USB-C naar USB-C-kabel, 1 m.

Compatibility

Supported OS: MS Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11 and later, Windows Server 2003 / 2008 / 2012 / 2016 and later, (supported are all 32- and 64-bit Windows OS versions), Mac OS X 10.4.x and higher.

Conformity notice

Operation of the device (the devices) may be affected by strong static, electrical or highfrequency fields (radio installations, mobile telephones, microwaves, electrostatic discharges).If this occurs, try increasing the distance from the devices causing the interference.

Disposal

The crossed-out wheelie-bin symbol means that you may not dispose of this product together with general household waste; instead, take it to a recycling point for electrical and electronic equipment. For information about local recycling points, contact your local authority, civic amenity site or the business where you purchased this product. The separate collection and recycling of used items of electrical and electronic equipment prevents any harmful substances they contain from harming human health and polluting the environmen.

Uitsluitend voor gebruik binnenshuis

Technical data for AC Adapter
Specifications in accordance with Regulation (EU) 2019/1782


Trade mark of the manufacturer	ISY	
Commercial registration number	HRB 4580	
Address of the manufacturer	Imtron GmbH Media-Saturn-Strasse 1 85053 Ingolstadt Germany	
Model identifier	IDO 3000	
	Value	Unit
Input voltage	100-240	VAC
Input AC frequency	50/60	Hz
Output voltage	9-21	VDC
Output current	6.35	A
Output power	35	W
Average active efficiency	75.1	%
No-load power consumption	0.10	W

PL

Stacja dokująca USB C Pro 15 w 1
IDO 3000

Zawartość:

- 1 x stacja dokująca
- 1 x adapter AC
- 1 x kabel USB C na USB C, 1m
- 1 x instrukcja obsługi



A: Podłączyć kabel USB-C do komputera
B: Podłączyć adapter AC

Uwaga: Tryb rozszerzonego ekranu i tryb lustrzanego ekranu są wyświetlane, gdy urządzenia zewnętrzne są podłączone do portów HDMI

Wyjście wyświetlacza wieloportowego				
System operacyjny Mac	Tryb rozszerzenia		4K przy 60Hz	4K przy 60Hz
			4K przy 60Hz	4K przy 60Hz
	Tryb lustrzany		4K przy 30Hz	4K przy 30Hz
			4K przy 30Hz	4K przy 30Hz
Windows	Tryb rozszerzenia		4K przy 60Hz	4K przy 60Hz
			4K przy 60Hz	Czarny ekran
	Tryb lustrzany		4K przy 30Hz	4K przy 30Hz
			4K przy 30Hz	4K przy 30Hz

Dane techniczne

3 x USB A 3.1 do 5 Gb/s transferu danych i 7,5 W mocy.
2 x USB A 2.0 do 480 Mb/s transferu danych i 2,5 W mocy.
2 x USB C 3.1 do 5 Gb/s transferu danych i 7,5 W mocy.
1 x RJ45 Gigabit Ethernet 10/100/1000 Mb/s.
2 x HDMI 2.0 rozdzielczość Ultra HD do 4K przy 60 Hz.
1 x DisplayPort 1.2 rozdzielczość Ultra HD do 4K przy 60 Hz.
1 x złącze audio 3,5 mm.
1 x czytnik kart SD i microSD 60 Mb/s transferu danych.
1 x zasilacz sieciowy AC 135 W, wejście: 110-240 V ~ 50/60 Hz 2,5 A (maks.)
Wyjście: 19,0-21,0 V DC, 6,75 A/135,0 W, zasilacz 35 W do stacji dokującej.
1 x port USB C do połączenia stacji dokującej z urządzeniem (np. notebookiem).
Urządzenie będzie ładowane do 100 W przez ten port.
Gotowe do użycia, nie są wymagane sterowniki.
1 x kabel USB C na USB C, 1 m.

Compatibility

Supported OS: MS Windows XP / Vista / 7 / 8 / 8.1 / 10 / 11 and later, Windows Server 2003 / 2008 / 2012 / 2016 and later, (supported are all 32- and 64-bit Windows OS versions), Mac OS X 10.4.x and higher.

Conformity notice

Operation of the device (the devices) may be affected by strong static, electrical or highfrequency fields (radio installations, mobile telephones, microwaves, electrostatic discharges).If this occurs, try increasing the distance from the devices causing the interference.

Disposal

The crossed-out wheelie-bin symbol means that you may not dispose of this product together with general household waste; instead, take it to a recycling point for electrical and electronic equipment. For information about local recycling points, contact your local authority, civic amenity site or the business where you purchased this product. The separate collection and recycling of used items of electrical and electronic equipment prevents any harmful substances they contain from harming human health and polluting the environmen.

Tylko do użytku wewnętrznego

Technical data for AC Adapter
Specifications in accordance with Regulation (EU) 2019/1782

Trade mark of the manufacturer	ISY	
Commercial registration number	HRB 4580	
Address of the manufacturer	Imtron GmbH Media-Saturn-Strasse 1 85053 Ingolstadt Germany	
Model identifier	IDO 3000	
	Value	Unit
Input voltage	100-240	VAC
Input AC frequency	50/60	Hz
Output voltage	9-21	VDC
Output current	6.35	A
Output power	35	W
Average active efficiency	75.1	%
No-load power consumption	0.10	W

ISY

15-in-1 USB-C Docking Station Pro
IDO 3000

Imtron GmbH
Media-Saturn-Strasse 1
85053 Ingolstadt
Germany
www.imtron.eu
www.isy-online.eu



IM_IDO 3000_240219_V12