




trol gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	299	range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,431 0,398
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)		1 106	Beam angle in degrees, or the range of beam angles that can be set	96
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value		6	Survival factor	1,00
the lumen maintenance factor		0,97		
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )		0,91	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		.. <sup>(b)</sup>	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,1	Stroboscopic effect metric (SVM)	0,1

(a): : not applicable;

(b): : not applicable;

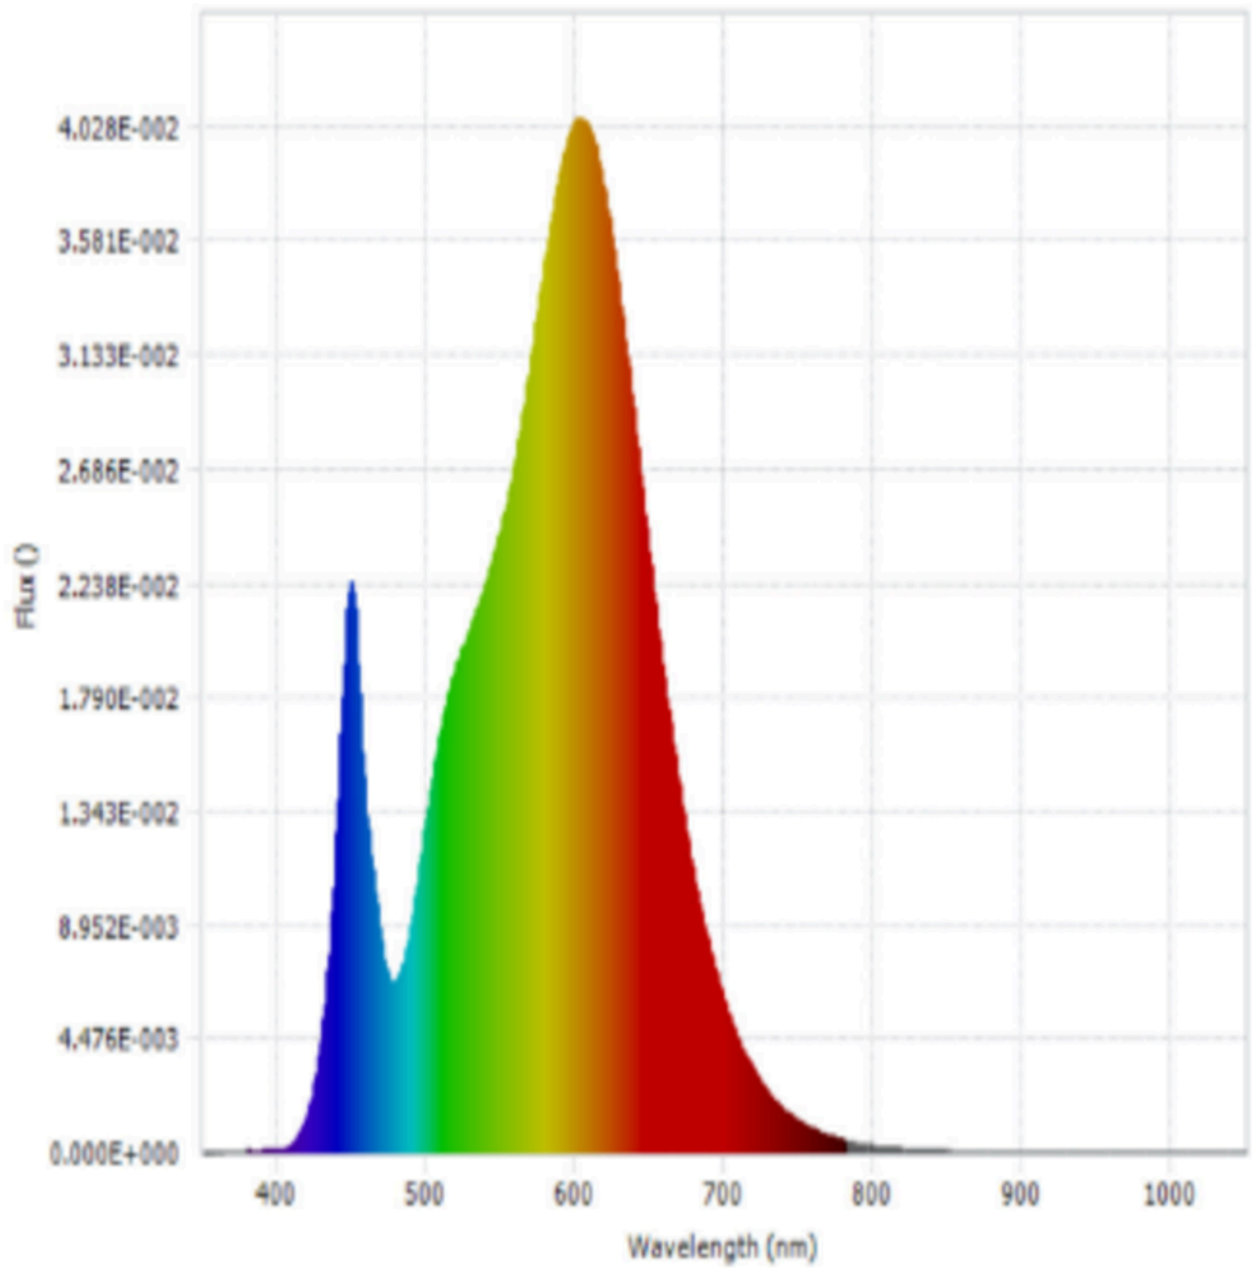

**EPREL registration number:** 2680204

Model placed on the Union market from 07/05/2026.



<https://eprel.ec.europa.eu/qr/2680204>

**Supplier:** Amazon EU S.à r.l. (Importer)

**Website:** [amazon.com](https://amazon.com)

**Customer care service:**

**Name:** Amazon\_Compliance Contact

**Website:** [www.amazon.com](https://www.amazon.com)

**Email:** [device-certification@amazon.com](mailto:device-certification@amazon.com)

**Phone:** +1 650-426-1100

**Address:**

Av. John F. Kennedy 38 1855 Luxembourg Luxembourg