



中国认可
国际互认
检测
TESTING
CNAS L3503

UN38.3 Test Report

UN38.3测试报告

Report No.
报告号 : 1815C50207712701

Client Name
委托单位 : Anker Innovations Limited
安克创新有限公司

Client Address
单位地址 : Unit 56, 8th Floor, Tower 2, Admiralty Centre,
18 Harcourt Road, Hong Kong
香港金钟夏慼道18号海富中心2座8楼56室

Product Name
产品名称 : Anker Nano Power Bank (10K,45W, Built-
In Retractable USB-C Cable)
Anker Nano 移动电源 (10K,45W,自带伸缩USB-C
线)

Report Date
报告日期 : 2025-04-29

Shenzhen Anbotek Compliance Laboratory Limited
深圳安博检测股份有限公司



1. SAMPLE DESCRIPTION 样品描述:

Sample Name: 样品名称		Anker Nano Power Bank (10K, 45W, Built-In Retractable USB-C Cable) Anker Nano 移动电源 (10K,45W,自带伸缩 USB-C 线)		Sample Model: 样品型号	A1638
Manufacturer: 制造商		Anker Innovations Limited 安克创新有限公司			
Address of manufacturer: 制造商地址		Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong 香港金钟夏慤道 18 号海富中心 2 座 8 楼 56 室			
Factory: 工厂		HU NAN GIANTSUN POWER ELECTRONICS CO., LTD 湖南炬神电子有限公司			
Address of factory: 工厂地址		Building 1,15, 16, 17, Taiwan Industrial Zone, Nonferrous Metals Industrial Park, 423038 Chenzhou, Hunan, PEOPLE'S REPUBLIC OF CHINA 中国湖南省郴州市有色金属产业园区台湾工业园第 1, 15, 16, 17 幢			
Battery Nominal Voltage: 电池标称电压	7.2V (Built-in battery)	Rated Capacity: 额定容量	5000mAh/ 36Wh	Trademark: 商标	ANKER
Standard Charge Current: 标准充电电流	5V---3A (USB-C)	Maximum Charge Current: 最大充电电流	5V---3A (USB-C)	Charge Limited Voltage: 充电限制电压	15.8V (USB-C)
Standard Discharge Current: 标准放电电流	5V---3A (USB-C)	Maximum Discharge Current: 最大放电电流	5V---3A (USB-C)	Discharge Cut-off Voltage: 放电终止电压	5.0V (Built-in battery)
Cells Number: 内含电芯个数	2PCS, (2S1P)	Cell Model: 电芯型号	INR21700-5000	Cell Rated Capacity: 电芯额定容量	5000mAh
Date of first receipt of samples: 首次样品接收日期		2024-10-30			
Date of Test: 检测日期		2024-10-30 ~ 2024-11-12			
Date of second receipt of samples: 第二次样品接收日期		2025-04-01			
Written by: 莫健强 Checked by: 朱 Approved by: 朱浩 编制 审核 批准					

2. REFERENCE METHOD 参考方法

UN "Manual of Tests and Criteria" Eighth revised edition ST/SG/AC.10/11/Rev.8/Subsection 38.3
联合国《试验和标准手册》第八修订版 38.3 节

3. EQUIPMENT LIST 设备清单

Name of equipment /Model

设备名称/型号

Altitude Simulation Testing Machine

模拟高空低压试验箱

High Fast Temperature&Humidity Chamber

快速温变箱

Vibration Testing Machine

振动试验机

Shock Testing Machine

机械冲击台

Short Circuit Testing Machine

短路试验机

Battery Internal resistance

电池内阻测试仪

Impact testing machine

冲击试验机

Programmable DC Power Supply

可编程直流电源

Electronic loading

电子负载

TRUE RMS multimeter

台式万用表

Electronic Balance

电子天平

Data Acquisition/Swith Unit

温升记录仪

4. ENVIRONMENTAL CONDITIONS OF THE TEST 环境条件

Temperature: (20±5) °C

温度

R.H.: (25~75) %RH

相对湿度

5. TEST ITEM AND CONCLUSION 测试项目及结论

ITEM 测试项目	SAMPLE NUMBER 样品编号	STANDARD 执行标准	CONCLUSION 结论
T1 Altitude simulation 高度模拟	B1~B4, B5~B8	ST/SG/AC.10/1 1/Rev.8	经测试, 该样品符合联合国《试验和标准手册》第八修订版 38.3 节标准要求 The sample has passed the items of UN "Manual of Tests and Criteria" Eighth revised edition ST/SG/AC.10/11/Rev.8/Subsection 38.3
T2 Thermal test 热测试			
T3 Vibration 振动			
T4 Shock 冲击			
T5 External short circuit 外部短路			
T6 Impact 撞击	C1~C5, C6~C10		
T7 Overcharge 过度充电	B9~B12, B13~B16		
T8 Forced discharge 强制放电	C11~C20, C21~C30		

说明 Notes:

B1-B4, B9-B12

为第一个充放电周期完全充电状态的电池组
Batteries at first cycle in fully charged states

B5-B8, B13-B16

为 25 个充放电周期后完全充电状态的电池组
Batteries after 25 cycles ending in fully charged states

C1-C5

为第一个充放电周期后 50%设计额定容量状态的电池
Cells at first cycle at 50% of the design rated capacity

C6-C10

为 25 个充放电周期后 50%设计额定容量状态的电池
Cells after 25 cycle at 50% of the design rated capacity

C11-C20

为第一个充放电周期后完全放电状态的电池
Cells at first cycle in fully discharged states

C21-C30

为 25 个充放电周期后完全放电状态的电池
Cells after 25 cycles ending in fully discharged states

6. TEST METHOD 测试方法

Tests T.1 to T.5 shall be conducted in sequence on the same cell or battery. Tests T.6 and T.8 shall be conducted using not otherwise tested cells or batteries. Test T.7 may be conducted using undamaged batteries previously used in Tests T.1 to T.5 for purposes of testing on cycled batteries. In order to quantify the mass loss, the following procedure is provided:

$$\text{Mass loss}(\%) = (M_1 - M_2) / M_1 \times 100$$

Where M_1 is the mass before the test and M_2 is the mass after the test. When mass loss does not exceed the values in Table blow, it shall be considered as “no mass loss”.

小型电池或电池组应按顺序进行试验 T.1 至 T.5。试验 T.6 和 T.8 应使用未另外试验过的电池或电池组。试验 T.7 可以使用原先在试验 T.1 至 T.5 中使用过的未损坏电池组进行，以便测试经过充放电的电池组。

质量损失的量化数值可用下式计算：

$$\text{质量损失}(\%) = (M_1 - M_2) / M_1 \times 100$$

式中 M_1 是试验前的质量， M_2 是试验后的质量。如质量损失不超过下表所列数值，即视为“无质量损失”。

Mass M of cell or battery 电池或电池组质量 M	Mass loss limit 质量损失限值
$M < 1\text{g}$	0.5%
$1\text{g} \leq M \leq 75\text{g}$	0.2%
$M > 75\text{g}$	0.1%

Test T.1 Altitude simulation

Test cells and batteries shall be stored at a pressure of 11.6 kPa or less for at least six hours at ambient temperature ($20 \pm 5^\circ\text{C}$).

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

试验 T.1 高度模拟

试验电池和电池组应在压力等于或低于 11.6 千帕和环境温度($20 \pm 5^\circ\text{C}$)下存放至少 6 小时。

如果无渗漏、无排气、无解体、无破裂和无起火，并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%，电池和电池组即符合这一要求。有关电压的要求不适用于完全放电状态的试验电池和电池组。

Test T.2 Thermal test

Test cells and batteries are to be stored for at least six hours at a test temperature equal to $72 \pm 2^\circ\text{C}$, followed by storage for at least six hours at a test temperature equal to $-40 \pm 2^\circ\text{C}$. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ($20 \pm 5^\circ\text{C}$). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

试验 T.2 温度试验

试验电池和电池组应先在试验温度等于 $72 \pm 2^\circ\text{C}$ 的条件下存放至少 6 小时，接着再在试验温度等于 $-40 \pm 2^\circ\text{C}$ 的条件下存放至少 6 小时。两个极端试验温度之间的最大时间间隔为 30 分钟。此程序重复进行，完成 10 次，接着将所有试验电芯和电池在环境温度 ($20 \pm 5^\circ\text{C}$) 下存放 24 小时。对于大型电池和电池组，暴露于极端试验温度的时间至少应为 12 小时。

如果无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%, 电池和电池组即符合这一要求。有关电压的要求不适用于完全放电状态的试验电池和电池组。

Test T.3 Vibration

Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face.

The logarithmic frequency sweep shall differ for cells and batteries with a gross mass of not more than 12 kg (cells and small batteries), and for batteries with a gross mass of more than 12 kg (large batteries).

For cells and small batteries: from 7 Hz a peak acceleration of 1 g_n is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 8 g_n occurs (approximately 50 Hz). A peak acceleration of 8 g_n is then maintained until the frequency is increased to 200 Hz.

For large batteries: from 7 Hz to a peak acceleration of 1 g_n is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 2 g_n occurs (approximately 25 Hz). A peak acceleration of 2 g_n is then maintained until the frequency is increased to 200 Hz.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire during the test and after the test and if the open circuit voltage of each test cell or battery directly after testing in its third perpendicular mounting position is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

试验 T.3 振动

电池和电池组紧固于振动机平台,但紧固程度不能造成电芯变形以致不能准确传递振动。振动应是正弦波形,对数频率扫描从 7 赫兹和 200 赫兹,再回到 7 赫兹,跨度为 15 分钟。这一振动过程须对三个相互垂直的电芯安装方位的每一方向重复进行 12 次,共为时 3 小时。其中一个振动方向必须与端面垂直。

作对数式频率扫描,对总质量不足 12 千克的电池和电池组(电池和小型电池组),和对 12 千克及更大的电池组(大型电池组)应有所不同。

对电池和小型电池组:从 7 赫兹开始,保持 1 g_n 的最大加速度,直到频率达到 18 赫兹。然后将振幅保持在 0.8 毫米(总位移 1.6 毫米),并增加频率直到最大加速度达到 8 g_n (频率约为 50 赫兹)。将最大加速度保持在 8 g_n 直到频率增加到 200 赫兹。

对大型电池组:从 7 赫兹开始,保持 1 g_n 的最大加速度,直到频率达到 18 赫兹。然后将振幅保持在 0.8 毫米(总行程 1.6 毫米)并增加频率直到最大加速度达到 2 g_n (频率约为 25 赫兹)。将最大加速度保持在 2 g_n 直到频率增加到 200 赫兹。

如果试验中和试验后无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电池或电池组在第三个垂直安装方位上的试验后立即测得的开路电压不小于在进行这一试验前电压的 90%, 电池和电池组即符合本项要求。有关电压的要求不适用于完全放电状态的试验电池和电池组。

Test T.4 Shock

Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery.

Each cell shall be subjected to a half-sine shock of peak acceleration of 150 g_n and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of 50 g_n and pulse duration of 11 milliseconds.

Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries. The formulas below are provided to calculate the appropriate minimum peak accelerations.

Battery 电池	Minimum peak acceleration 最小峰值加速度	Pulse duration 脉冲持续时间
Small batteries 小型电池组	150 g _n or result of formula 150 g _n 或公式计算 $\text{Acceleration 加速度}(g_n)=\sqrt{\frac{100850}{\text{mass 质量}}}$ whichever is smaller 取数值较少者	6 ms 6 毫秒
Large batteries 大型电池组	50 g _n or result of formula 50 g _n 或公式计算 $\text{Acceleration 加速度}(g_n)=\sqrt{\frac{30000}{\text{mass 质量}}}$ whichever is smaller 取数值较少者	11 ms 11 毫秒

* Mass is expressed in kilograms 质量单位为千克

Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

试验 T.4 冲击

试验电池和电池组用坚固支架紧固在试验机上，支架支撑着每个试验电池的所有安装面。

每个电芯须经受最大加速度 150 g_n 和脉冲持续时间 6 毫秒的半正弦波冲击。不过，大型电池须经受最大加速度 50 g_n 和脉冲持续时间 11 毫秒的半正弦波冲击。

每个电池须经受的正弦波冲击的最大加速度取决于电池组的质量。小型电池组的脉冲持续时间 6 毫秒，大型电池组的脉冲持续时间 11 毫秒。以上公式用于计算合适的最低限度最大加速度。

每个电池或电池组须在三个相互垂直的电池或电池组安装方位的正极方向经受三次冲击，接着在负极方向经受三次冲击，总共经受 18 次冲击。

如果无渗漏、无排气、无解体、无破裂和无起火，并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%，电池和电池组即符合这一要求。有关电压的要求不适用于完全放电状态的试验电池和电池组。。

Test T.5 External short circuit

The cell or battery to be tested shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of 57±4°C, measured on the external case. This period of time depends on the size and design of the cell or battery and should be assessed and documented. If this assessment is not feasible, the exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries. Then the cell or battery at 57±4°C shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm.

This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to 57±4°C, or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value.

The short circuit and cooling down phases shall be conducted at least at ambient temperature.

Cells and batteries meet this requirement if their external temperature does not exceed 170°C and there is no disassembly, no rupture and no fire during the test and within six hours after the test.

试验 T.5 外部短路

对于待试电池或电池组，应加温一段必要的时间，使从外壳测量的温度达到均匀的稳定温度 57±4°C，这段时间的长短取决于电池或电池组的大小和设计，对于这个持续时间应加以评估和记录。如无法进行这种评估，则小型电池和小型电池组的暴露时间应至少 6 小时，大型电池和大型电池组的暴露时间应至少 12 小时。然后，电池或电池组应在 57±4°C 下经受总外电阻小于 0.1 欧姆的短路条件。

这一短路条件应在电池或电池组外壳温度回到 $57\pm4^{\circ}\text{C}$ 后继续至少 1 小时, 或在大型电池组的情况下外壳温度降幅达试验中所观察的最高温升幅的二分之一并保持低于该数值。

短路和降温阶段应至少相当于环境温度。

如果外壳温度不超过 170°C , 并且在试验过程中及试验后 6 小时内无解体、无破裂, 无起火, 电池和电池组即符合本项要求。

Test T.6 Impact / Crush

Test procedure - Impact (applicable to cylindrical cells not less than 18 mm in diameter)

The test sample cell or component cell is to be placed on a flat smooth surface. A $15.8\text{ mm} \pm 0.1\text{ mm}$ diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A $9.1\text{ kg} \pm 0.1\text{ kg}$ mass is to be dropped from a height of $61 \pm 2.5\text{ cm}$ at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.

The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the $15.8\text{ mm} \pm 0.1\text{ mm}$ diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact.

Test procedure - Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18 mm in diameter)

A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached.

- (a) The applied force reaches $13\text{ kN} \pm 0.78\text{ kN}$;
- (b) The voltage of the cell drops by at least 100 mV; or
- (c) The cell is deformed by 50% or more of its original thickness.

Once the maximum pressure has been obtained, the voltage drops by 100 mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released.

A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis.

Each test cell or component cell is to be subjected to one crush only. The test sample shall be observed for a further 6 h. The test shall be conducted using test cells or component cells that have not previously been subjected to other tests.

Cells and component cells meet this requirement if their external temperature does not exceed 170°C and there is no disassembly and no fire during the test and within six hours after this test.

试验 T.6 撞击/挤压

试验程序—撞击 (适用于直径不小于 18 毫米的圆柱形电池)

试样电池或原件电池放在平坦光滑的表面上, 一根 316 型不锈钢棒横放在试样中心, 钢棒直径 $15.8\text{ mm} \pm 0.1\text{ mm}$, 长度至少 6 厘米, 或电池最长端的尺寸, 取二者之长者。将一块 $9.1\text{ kg} \pm 0.1\text{ kg}$ 的重锤从 $61 \pm 2.5\text{ cm}$ 高处跌落到钢棒和试样交叉处, 使用一个几乎没有摩擦的、对落体重锤阻力最小的垂直轨道或管道加以控制。垂直轨道或管道用于引导落锤沿水平支撑表面呈 90 度落下。

接受撞击的试样, 纵轴应与平坦表面平行并与横放在试样中心的直径 $15.8\text{ mm} \pm 0.1\text{ mm}$ 弯曲表面的纵轴垂直。每一试样只经受一次撞击。

试验程序—挤压 (适用于棱柱形、袋装、硬币/纽扣电池和直径小于 18 毫米的圆柱形电池)

将电池或原件电池放在两个平面之间挤压, 挤压力度逐渐加大, 在第一个接触点上的速度大约为 1.5 厘米/秒。挤压持续进行, 直到出现以下三种情况之一:

- (a) 施加的力量达到 $13\text{ kN} \pm 0.78\text{ kN}$;
- (b) 电池的电压下降至少 100 毫伏; 或
- (c) 电池变形达到原始厚度的 50%或以上。

一旦达到最大压力、电压下降 100 毫伏或更多, 或电池变形至少达原厚度的 50%, 即可解除压力。

棱柱形或袋装电池应从最宽的一面施压。纽扣/硬币形电池应从其平坦表面施压。圆柱形电池应从与纵轴垂直的方向施压。

每个试样电池或原件电池只做一次挤压试验。试样应继续观察 6 小时。试验应使用之间未做过其他试验的电池或原件电池进行。

如果外壳温度不超过 170°C, 并且在试验过程中及试验后 6 小时内无解体、无破裂, 无起火, 电池和电池组即符合本项要求。

Test T.7 Overcharge

The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:

(a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.

(b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.

Tests are to be conducted at ambient temperature; the duration of the test shall be 24 hours.

Rechargeable batteries meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

试验 T.7 过度充电

充电电流必须是制造商建议的最大持续充电电流的两倍。试验的最小电压如下:

(a) 制造商建议的充电电压不大于 18 伏时, 试验的最小电压应是电池最大充电电压的两倍或 22 伏两者中的较小者;

(b) 制造商建议的充电电压大于 18 伏时, 试验的最小电压应为最大充电电压的 1.2 倍。

试验应在环境温度下进行, 进行试验的时间应为 24 小时。

可充电电池组在试验过程中和试验后 7 天内无解体, 无起火, 即符合本项要求。

Test T.8 Forced discharge

Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer.

The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).

Primary or rechargeable cells meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.


试验 T.8 强制放电

每个电池应在环境温度下与 12 伏直流电源串联在起始电流等于制造商给定的最大放电电流的条件下强制放电。

将适当大小和额定值的电阻负荷与试验电池串联, 计算得出给定的放电电流。对每个电池进行强制放电, 放电时间(小时)应等于其额定容量除以初始试验电流(安培)。

原电池或可充电电池如在试验过程中和试验后 7 天内无解体, 无起火, 即符合本项要求。

7. TEST PROCEDURE 测试程序

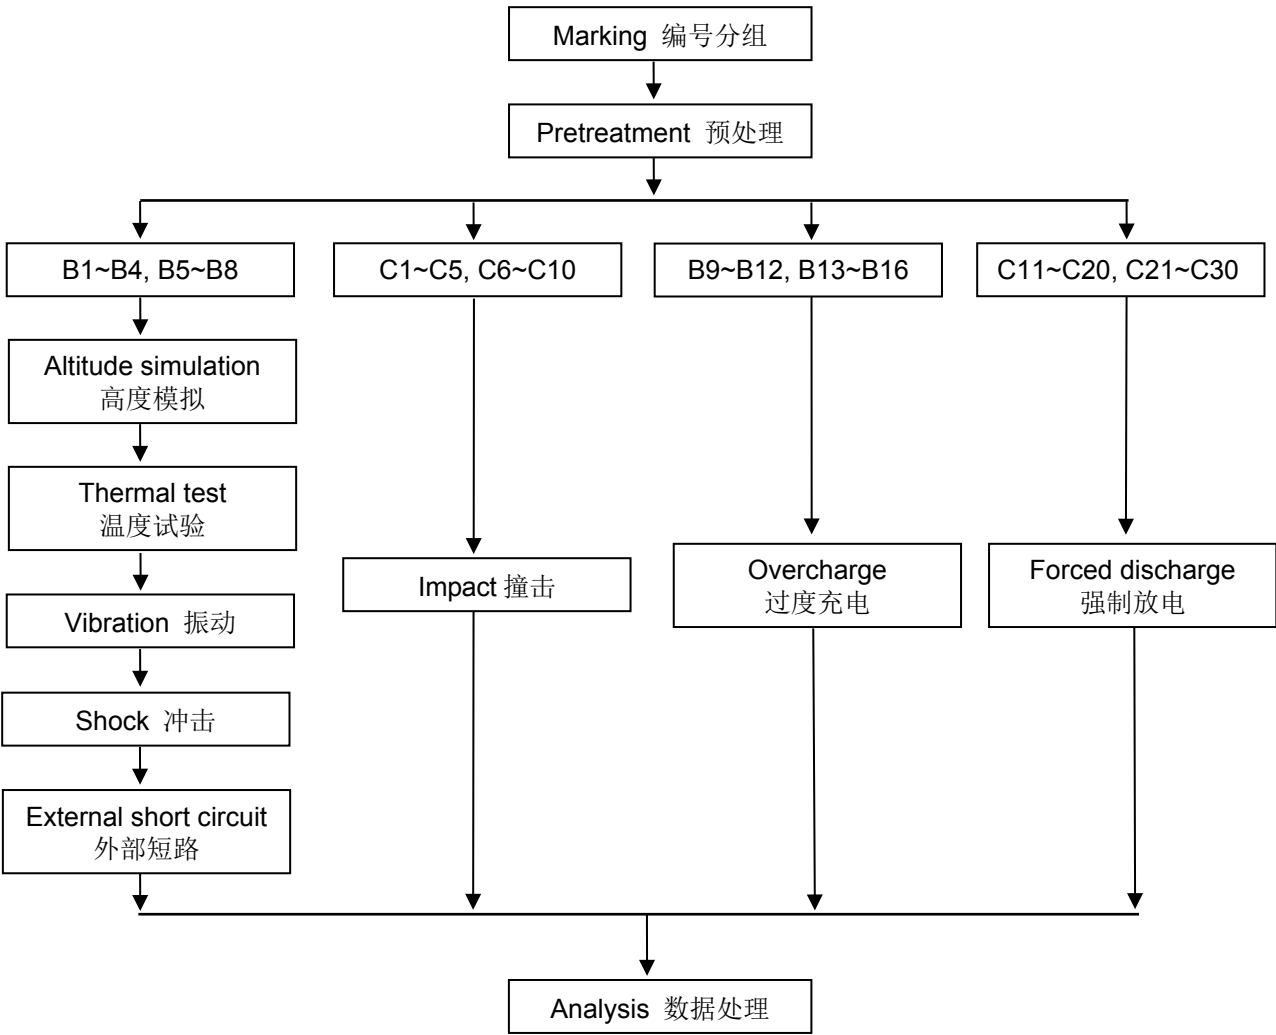

8. DATA 测试数据

T.1 Altitude simulation 高度模拟

Sample No. 样品编号	Pre-test 测试前		After test 测试后		Mass loss 质量亏损 (%)	Residual OCV 剩余电压 (%)	Results 结果
	Mass 质量	Voltage 电压 (USB-C)	Mass 质量	Voltage 电压 (USB-C)			
B1	235.65	5.107	235.63	5.106	0.01	99.98	Pass 通过
B2	234.88	5.095	234.88	5.094	0.00	99.98	Pass 通过
B3	236.27	5.096	236.27	5.096	0.00	100.00	Pass 通过
B4	236.56	5.092	236.54	5.092	0.01	100.00	Pass 通过
B5	235.70	5.092	235.70	5.092	0.00	100.00	Pass 通过
B6	236.58	5.097	236.56	5.096	0.01	99.98	Pass 通过
B7	236.22	5.104	236.20	5.104	0.01	100.00	Pass 通过
B8	236.10	5.098	236.10	5.097	0.00	99.98	Pass 通过
Requirements 要求: After the test, there is no leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each test cell or battery after testing is not less than 90 % of its voltage immediately prior to this procedure.测试后, 样品无渗漏、无排气、无解体、无破裂和无起火。并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。							

T.2 Thermal test 热测试

Sample No. 样品编号	Pre-test 测试前		After test 测试后		Mass loss 质量亏损 (%)	Residual OCV 剩余电压 (%)	Results 结果
	Mass 质量	Voltage 电压 (USB-C)	Mass 质量	Voltage 电压 (USB-C)			
B1	235.63	5.106	235.56	5.091	0.03	99.71	Pass 通过
B2	234.88	5.094	234.83	5.079	0.02	99.71	Pass 通过
B3	236.27	5.096	236.25	5.076	0.01	99.61	Pass 通过
B4	236.54	5.092	236.47	5.074	0.03	99.65	Pass 通过
B5	235.70	5.092	235.65	5.071	0.02	99.59	Pass 通过
B6	236.56	5.096	236.49	5.075	0.03	99.59	Pass 通过
B7	236.20	5.104	236.15	5.089	0.02	99.71	Pass 通过
B8	236.10	5.097	236.03	5.080	0.03	99.67	Pass 通过
Requirements 要求: After the test, there is no leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each test cell or battery after testing is not less than 90 % of its voltage immediately prior to this procedure.测试后, 样品无渗漏、无排气、无解体、无破裂和无起火。并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。							

T.3 Vibration 振动

Sample No. 样品编号	Pre-test 测试前		After test 测试后		Mass loss 质量亏损 (%)	Residual OCV 剩余电压 (%)	Results 结果
	Mass 质量	Voltage 电压 (USB-C)	Mass 质量	Voltage 电压 (USB-C)			
B1	235.56	5.091	235.56	5.091	0.00	100.00	Pass 通过
B2	234.83	5.079	234.80	5.079	0.01	100.00	Pass 通过
B3	236.25	5.076	236.25	5.075	0.00	99.98	Pass 通过
B4	236.47	5.074	236.42	5.073	0.02	99.98	Pass 通过
B5	235.65	5.071	235.65	5.070	0.00	99.98	Pass 通过
B6	236.49	5.075	236.47	5.074	0.01	99.98	Pass 通过
B7	236.15	5.089	236.12	5.089	0.01	100.00	Pass 通过
B8	236.03	5.080	236.03	5.080	0.00	100.00	Pass 通过
Requirements 要求: After the test, there is no leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each test cell or battery after testing is not less than 90 % of its voltage immediately prior to this procedure.测试后, 样品无渗漏、无排气、无解体、无破裂和无起火。并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。							

T.4 Shock 冲击

Sample No. 样品编号	Pre-test 测试前		After test 测试后		Mass loss 质量亏损 (%)	Residual OCV 剩余电压 (%)	Results 结果
	Mass 质量	Voltage 电压 (USB-C)	Mass 质量	Voltage 电压 (USB-C)			
B1	235.56	5.091	235.51	5.090	0.02	99.98	Pass 通过
B2	234.80	5.079	234.80	5.079	0.00	100.00	Pass 通过
B3	236.25	5.075	236.23	5.074	0.01	99.98	Pass 通过
B4	236.42	5.073	236.42	5.073	0.00	100.00	Pass 通过
B5	235.65	5.070	235.63	5.070	0.01	100.00	Pass 通过
B6	236.47	5.074	236.45	5.073	0.01	99.98	Pass 通过
B7	236.12	5.089	236.12	5.088	0.00	99.98	Pass 通过
B8	236.03	5.080	236.03	5.080	0.00	100.00	Pass 通过
Requirements 要求: After the test, there is no leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each test cell or battery after testing is not less than 90 % of its voltage immediately prior to this procedure.测试后, 样品无渗漏、无排气、无解体、无破裂和无起火。并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。							

T.5 External short circuit 外部短路

Sample No. 样品编号	Max. surface temperature (°C) 表面最高温度 (USB-C)	Results 结果
B1	57.3	Pass 通过
B2	57.7	Pass 通过
B3	57.1	Pass 通过
B4	57.5	Pass 通过
B5	57.4	Pass 通过
B6	57.7	Pass 通过
B7	57.6	Pass 通过
B8	57.4	Pass 通过
Requirements 要求: Test sample external temperature does not exceed 170 °C and there is no disassembly, no rupture and no fire during the test and within six hours after the test. 测试样品表面温度不超过 170°C, 测试中与测试后 6 小时内无解体、无破裂、无起火。		

T.6 Impact 撞击

Sample No. 样品编号	Max. surface temperature (°C) 表面最高温度	Results 结果
C1	21.8	Pass 通过
C2	22.9	Pass 通过
C3	21.7	Pass 通过
C4	22.8	Pass 通过
C5	22.9	Pass 通过
C6	22.5	Pass 通过
C7	22.6	Pass 通过
C8	22.5	Pass 通过
C9	21.1	Pass 通过
C10	21.6	Pass 通过
Requirements 要求: Test sample external temperature does not exceed 170 °C and there is no disassembly, no rupture and no fire during the test and within six hours after the test. 测试样品表面温度不超过 170°C, 测试中与测试后 6 小时内无解体、无破裂、无起火。		

T.7 Overcharge 过度充电

Sample No. 样品编号	Results 结果
B9	Pass 通过
B10	Pass 通过
B11	Pass 通过
B12	Pass 通过
B13	Pass 通过
B14	Pass 通过
B15	Pass 通过
B16	Pass 通过
Requirements 要求: There is no disassembly and no fire during the test and within seven days after the test.样品在测试中和测试后 7 天内无解体、无起火。	

T.8 Forced discharge 强制放电

Sample No. 样品编号	Results 结果
C11	Pass 通过
C12	Pass 通过
C13	Pass 通过
C14	Pass 通过
C15	Pass 通过
C16	Pass 通过
C17	Pass 通过
C18	Pass 通过
C19	Pass 通过
C20	Pass 通过
C21	Pass 通过
C22	Pass 通过
C23	Pass 通过
C24	Pass 通过
C25	Pass 通过
C26	Pass 通过
C27	Pass 通过
C28	Pass 通过
C29	Pass 通过
C30	Pass 通过
Requirements 要求: There is no disassembly and no fire during the test and within seven days after the test.样品在测试中和测试后 7 天内无解体、无起火。	

9. PHOTOS OF THE SAMPLE 样品照片

Battery 电池组

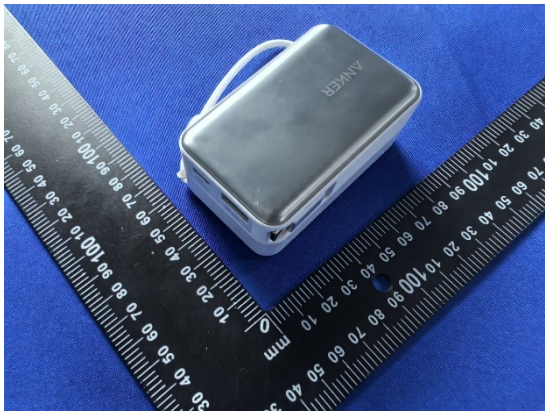


Photo 1 图片 1



Photo 2 图片 2

Anker Nano Power Bank (10K, 45W, Built-In Retractable USB-C Cable) / Anker Nano 移动电源 (10K, 45W, 自带伸缩 USB-C 线)
Model/型号/品番: A1638 Total Cell Capacity/电芯总容量: 10000mAh
Battery Capacity/额定容量: 5000mAh 7.2VDC/36Wh (Two Cells in Series/两枚电芯串联) 定格电压: 5VDC 定格容量: 5800mAh
USB-C Cable/Port/线/口 Input/输入/入力: 5V=3A / 9V=3A / 12V=2.5A / 15V=2A (30W Max) USB-C Cable/Port/线/口 Output/输出/出力: 5V=3A / 9V=3A / 10V=2.25A / 15V=3A / 20V=2.25A (45W Max)
USB-A Output/输出/出力: 5V=3A / 9V=2A / 10V=2.25A / 12V=1.5A (22.5W Max) Total Output/总输出/合计出力: 5V=4.8A (24W Max)

Photo 3 图片 3

Cell 电芯

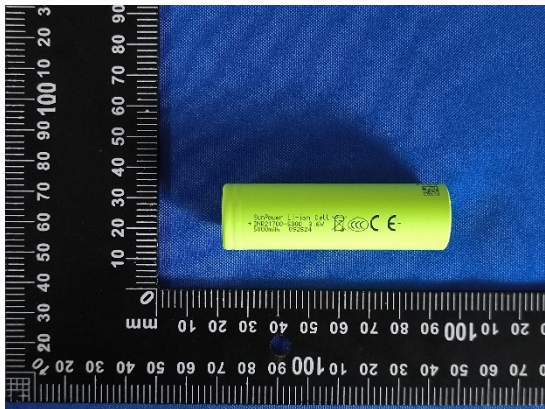


Photo 4 图片 4

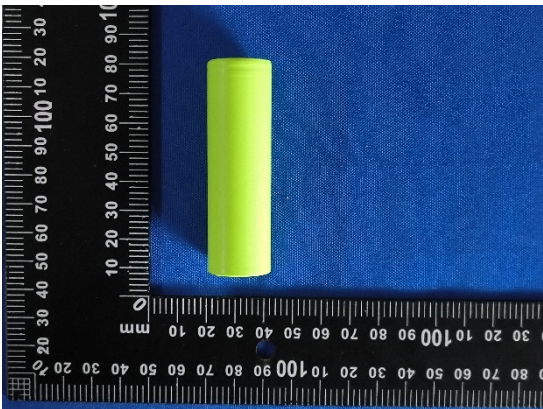


Photo 5 图片 5

DECLARATION

声明

1. Test place Lab: Shenzhen Anbotek Compliance Laboratory Limited
Address: 401, 402, Building A, Hourui No.3 Industrial Zone, No.2 Kaicheng Road, Hourui Community, Hangcheng Street, Baoan District, Shenzhen, Guangdong, China.
测试实验室: 深圳安博检测股份有限公司
地址: 广东省深圳市宝安区航城街道后瑞社区凯成路2号后瑞第三工业区A栋401、402
2. This report shall not be revised and deleted.
本报告不能修改和删除。
3. The test results presented in this report are only relevant to the test sample.
本报告出现的试验结果仅与试验样品有关。
4. As specified by the client, this report is transformed from Original report 1815C40187512701, which is issued on December 09, 2024, no new test item is involved. The battery photo and the battery label has been changed in this report has not changed the key materials, product design and production process of the samples in the original report, nor has the production plant changed.
根据客户要求, 本报告是1815C40187512701的变更报告, 原报告签发于2024年12月09日, 不涉及新的测试项目。本报告中变更了电池照片和电池标签, 该变更未改变原报告中样品的关键材料, 产品设计和生产工艺, 生产厂也未改变。
5. This report shall not be published as advertisement without the approval of Shenzhen Anbotek Compliance Laboratory Limited.
本报告在未经深圳安博检测股份有限公司书面许可情况下不能用于宣传、广告之用。
6. This report shall not be copied partly without the written approval of Shenzhen Anbotek Compliance Laboratory Limited.
除非全部复制, 否则无深圳安博检测股份有限公司书面批准本报告不得部分复制。
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.
本报告数据将应监管机构要求, 同步至相应国家市场监督管理总局及跨境电商平台。

-- End of report --

-- 报告结束 --