



NO.1124080143

检 测 报 告

Test Report

样品名称：可充电锂离子电池组 433875 7.4V 1250mAh 9.25Wh

Name of Sample: Rechargeable Li-ion Battery Pack 433875 7.4V
1250mAh 9.25Wh

委托单位：惠州市赛能电池有限公司

Consignor: Fullymax Battery Co., Ltd.



上海化工院检测有限公司

Shanghai Institute of Chemical Industry Testing Co., Ltd.

上海化工院检测有限公司
检测报告

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report

NO. 1124080143

1/11

样品名称 Name of Sample	中文 Chinese	可充电锂离子电池组 433875 7.4V 1250mAh 9.25Wh	
	英文 English	Rechargeable Li-ion Battery Pack 433875 7.4V 1250mAh 9.25Wh	
样品编号 Sample No.	1124080143		
委托单位 Consignor	惠州市赛能电池有限公司 Fullymax Battery Co., Ltd.		
生产单位 Manufacturer	惠州市赛能电池有限公司 Fullymax Battery Co., Ltd.		
检测方法 Test method	联合国《试验和标准手册》 ST/SG/AC. 10/11/Rev. 8 38.3 UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3		
判定标准 Criterion	联合国《试验和标准手册》 ST/SG/AC. 10/11/Rev. 8 38.3 UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3		
样品外观 Appearance	蓝色 塑料薄膜外壳 Blue Plastic film shell		
样品接受日期 Accepted Date	2024-08-06	检测起迄日期 Test Date	2024-08-16 ~ 2024-09-09
检测项目 Test Items	高度模拟;热测试;振动;冲击;外短路;挤压;过充电;强制放电 Altitude simulation, Thermal test, Vibration, Shock, External short circuit, Crush, Overcharge, Forced discharge		
检测结论 Conclusion	经检测, 该样品符合联合国《试验和标准手册》ST/SG/AC. 10/11/Rev. 8 38.3标准要求。 The sample has passed the test items of UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3 生效日期(Date): 2024-09-10		
备注 Comment	可充电锂电池组Rechargeable Lithium Battery.		
委托单位地址 Consignor Address	/		邮政编码 Post Code /

批准
Approver:
职务
Title:

许勉

审核
Checker:

丁思

编制
Compiler:

傅佳

新能源安全部部长(Head of New Energy Safety Department)



上海化工院检测有限公司

检 测 报 告

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report

NO. 1124080143

2/11

序号 No.	检测项目名称 Name of Test Items	标准要求或标准条款号 Standard requirement or The Clause Number of Standard	检测结果 Test Result	本项结论 Conclusion	备注 Remark
1	高度模拟 Altitude simulation	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8 38.3 试验T.1 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3 Test T.1	见附表 1 See Appendix 1	合格 Passed	/
2	热测试 Thermal test	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8 38.3 试验T.2 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3 Test T.2	见附表 2 See Appendix 2	合格 Passed	/
3	振动 Vibration	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8 38.3 试验T.3 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3 Test T.3	见附表 3 See Appendix 3	合格 Passed	/
4	冲击 Shock	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8 38.3 试验T.4 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3 Test T.4	见附表 4 See Appendix 4	合格 Passed	/
5	外短路 External short circuit	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8 38.3 试验T.5 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3 Test T.5	见附表 5 See Appendix 5	合格 Passed	/
6	挤压 Crush	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8 38.3 试验T.6 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3 Test T.6	见附表 6 See Appendix 6	合格 Passed	/
7	过充电 Overcharge	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8 38.3 试验T.7 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3 Test T.7	见附表 7 See Appendix 7	合格 Passed	/
8	强制放电 Forced discharge	联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8 38.3 试验T.8 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3 Test T.8	见附表 8 See Appendix 8	合格 Passed	/
检测环境条件 Test Environment Condition		环境温度:20℃-25℃;环境湿度:/% Ambient temperature:20℃-25℃;Ambient humidity:/%			
分包检验情况 Subcontracted Test Condition		检测项目 Test Item	/		
		分包实验室 Subcontracted Laboratory	名称 Name	/	邮编 Post Code
			地址 Address	/	电话 Tel

检测报告-附表1

NO. 1124080143

3/11

[illegible]

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report—Appendix 2

4/11

备注: L-泄漏 V-漏气 D-解体 R-破裂 F-起火 O-无泄漏、无漏气、无解体、无破裂、无起火。
Note: L-Leakage V-Venting D-Disassembly R-Rupture F-Fire O-No Leakage, No Venting,
No Disassembly, No Rupture & No Fire.

[illegible]

检测报告-附表4

NO. 1124080143

6/11

[illegible]

检测报告-附表5

NO. 1124080143

7/11

序号 No.	5	检测项目名称 Name of Test Items	外短路 External short circuit
样品编号 Sample No.	样品状态 Sample Status	样品表面最高温度 Max. External Temperature /℃	其他现象 Other Event
001	1CYC完全充电 1CYC Fully charged	57.0	O
002	1CYC完全充电 1CYC Fully charged	56.2	O
003	1CYC完全充电 1CYC Fully charged	57.1	O
004	1CYC完全充电 1CYC Fully charged	56.5	O
005	25CYC完全充电 25CYC Fully charged	56.2	O
006	25CYC完全充电 25CYC Fully charged	58.0	O
007	25CYC完全充电 25CYC Fully charged	57.8	O
008	25CYC完全充电 25CYC Fully charged	57.7	O
以下空白	This space intentionally left blank		

备注：D-解体 R-破裂 F-起火 O-无解体、无起火、无破裂。
Note: D-Disassembly R-Ruptur F-Fire O-No Disassembly,No Fire & No Rupture.

检测报告-附表6

Testing Co., Ltd. Test Report—Appendix 6

8/11

Note: D-Disassembly F-Fire O-No Disassembly & No Fire.

检测报告-附表7

NO. 1124080143

9/11

[illegible]

上海化工院检测有限公司

检测报告 - 附表8

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report — Appendix 8

NO. 1124080143


10/11

序号 No.	8	检测项目名称 Name of Test Items	强制放电 Forced discharge
样品编号 Sample No.	样品状态 Sample Status	其他现象 Other Event	
027	1CYC完全放电 1CYC Fully discharged	O	
028	1CYC完全放电 1CYC Fully discharged	O	
029	1CYC完全放电 1CYC Fully discharged	O	
030	1CYC完全放电 1CYC Fully discharged	O	
031	1CYC完全放电 1CYC Fully discharged	O	
032	1CYC完全放电 1CYC Fully discharged	O	
033	1CYC完全放电 1CYC Fully discharged	O	
034	1CYC完全放电 1CYC Fully discharged	O	
035	1CYC完全放电 1CYC Fully discharged	O	
036	1CYC完全放电 1CYC Fully discharged	O	
037	25CYC完全放电 25CYC Fully discharged	O	
038	25CYC完全放电 25CYC Fully discharged	O	
039	25CYC完全放电 25CYC Fully discharged	O	
040	25CYC完全放电 25CYC Fully discharged	O	
041	25CYC完全放电 25CYC Fully discharged	O	
042	25CYC完全放电 25CYC Fully discharged	O	
043	25CYC完全放电 25CYC Fully discharged	O	
044	25CYC完全放电 25CYC Fully discharged	O	
045	25CYC完全放电 25CYC Fully discharged	O	
046	25CYC完全放电 25CYC Fully discharged	O	
备注：D-解体 F-起火 O-无解体、无起火。 Note: D-Disassembly F-Fire O-No Disassembly & No Fire.			

上海化工院检测有限公司
检测报告-附图
Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report—Appendix

NO. 1124080143

11/11

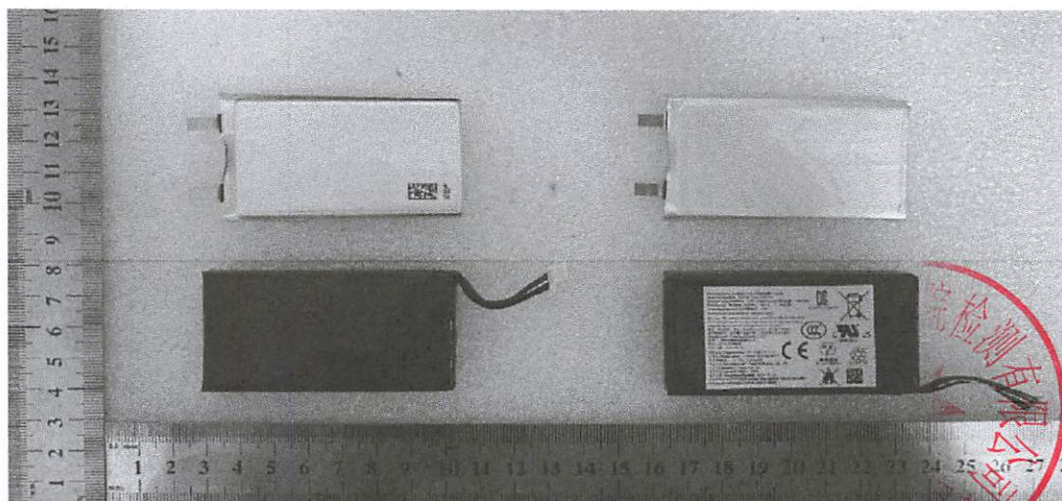

Rechargeable Li-ion Battery Pack/可充电锂离子电池组
Model Number/型号: 433875 (2ICP/5/39/71)
Nominal Voltage/标称电压: 7.4V Rated Capacity/额定容量: 1250mAh
Rated Energy/额定能量: 9.25Wh Red/红: + Black/黑: -
Charging voltage limit/充电限制电压: 8.4V
Execution standard/执行标准: GB31241-2022
Warning: Do not disassemble, strike, press, throw into fire. Stop using if the battery is swollen. Do not place the battery on high-temperature locations. Do not use if the battery immersion in water!
警告: 禁止拆解、撞击、挤压或投入火中。若出现严重鼓胀, 请勿继续使用。请勿置于高温环境中, 电池浸水后禁止使用!
Manufacturer: Fullymax Battery CO., LTD
生产厂: 惠州市赛能电池有限公司
Made in China/中国制造
Date/日期: 2024-06-18
제품명칭 (Product name): 잔지(리튬이온전지)
모델명 (Model name): 433875 (2ICP/5/39/71)
정격 (Rating): 7.4 Vd.c, 1250mAh
제조자명 (Manufacturer): Fullymax Battery CO., LTD
신고인 (Declarer): Prinics Co., Ltd
제조국 (Country of Origin): China
제조년월 (Manufacturing date): 2024 06 18
아프터서비스연락처 (A/S contact information): +82-31-293-5991
A/S contact information can be used in Korea.

XU100757-22014A

CCC

PS E

株式会社 ケンコー・トキナー

Li-ion 00

MH47843

CE

UL US

Recycling symbol

Fire symbol

QR code

报告结束